

Bobina di sgancio - Release coil

adatta per - suitable for

IHS 80A÷200A 3-4 pole
IHF 80A÷160A 3-4 pole




Microswitch

Contatto di risparmio di intervento della bobina di apertura dell'interruttore

Microswitch

Protection contact for release coil.



Code	48V 50Hz	110V 50Hz	220V 50Hz	24V d.c.	48V d.c.	60V d.c.	100V d.c.
EXHBA.....	AC048	AC110	AC220	DC024	DC048	DC060	DC100

Code	EXHSW
------	-------




contatti ausiliari

a richiesta, tutti gli interruttori possono essere equipaggiati con contatti ausiliari che potranno essere anticipati o ritardati rispetto al contatto principale (come diagramma sottoriportato *). I contatti ausiliari possono essere protetti da una apposita calotta contro i contatti accidentali.

auxiliary contacts

on request, all switches can be equipped with auxiliary contacts, that can be leading or logging as regard the main contacts (see the diagram below *). The auxiliary contacts can be protected with a cover against accidental touches.

(*) potere di interruzione	AC11	V	24	110	220	380	600
		A	10	6,5	4,5	2,6	1,6
breaking capacity	DC11	V	24	110	220	380	600
		A	5	1,1	0,6	0,3	0,15

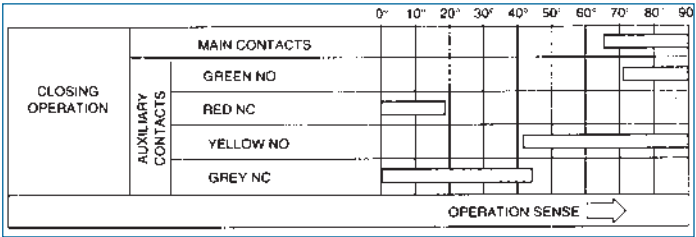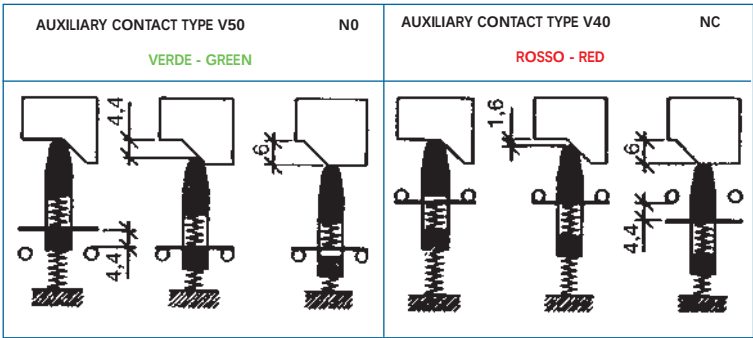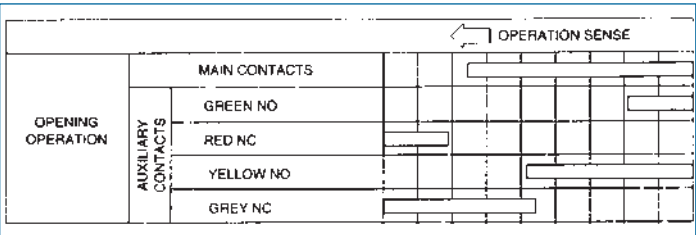

1NO	1NC	1NO+1NC	1NO+1NO	1NC+1NC	2NO+2NC	2NO+2NO	2NC+2NC
EXHCAU11V	EXHCAU12	EXHCAU13V	EXHCAU14V	EXHCAU15	EXHCAU16V	EXHCAU17V	EXHCAU18



Legenda - Legend
Aperto - Open
Chiuso - Closed

1NO	1NC	1NO+1NC	1NO+1NO	1NC+1NC	2NO+2NC	2NO+2NO	2NC+2NC
EXHCAU1V	EXHCAU2	EXHCAU3V	EXHCAU4V	EXHCAU5	EXHCAU6V	EXHCAU7V	EXHCAU8



i contatti ausiliari sono forniti completi di:
the auxiliary contacts are supplied complete with:



Code

adatto per suitable for		EXHCAU1	EXHCAU2	EXHCAU3
	IHF	32A÷63A	80A÷100A	125A÷160A
	IHS	32A÷63A	80A÷125A	160A÷250A



impiego
employment