

Low voltage NH knife-blade fuse-links

NV/NH KOMBI advantages

ETI is introducing a new generation of low-voltage fuse-links from size NV00C up to NV3 with new, dual indication of fuse-link operation, called KOMBI. The indicator is easily visible on the top and centre of the fuse-link, whether it is situated in a standard fuse base or vertical fuse rail or in fuse-switch disconnecter.

The most important advantages of NV/NH KOMBI fuse-links:

- High breaking capacity, 120 kA (400 V gG - except NV00C and NV00CI, and 500 V gG) and 100 kA (400 V gG NV00C and NV00CI, 690 V gG, 400 V gTR, 400 V gF and 690 V aM)
- Rated voltages: 400 V a.c., 500 V a.c., 690 V a.c.
- Two versions of covers: aluminium, when the removal tag is under voltage and plastic, when insulated metal removal tag is incorporated into the plastic cover
- VDE certificates and CCA/CB test reports

General about NV/NH fuse-links

Their dimensions correspond with DIN 43620, other technical characteristics correspond with the requirements of the following standards:

- Rated voltage 400V/500V/690V/gG: IEC 60269-1:2005 / EN 60269-1:1998+A1:2005 IEC 60269-2:1986+Corr.1:1996+A1:1995+A2:2001 / EN 60269-2:1995+A1:1998+A2:2002 IEC 60269-2-1:2004 / HD 60269-2-1:2005
- Rated voltage 690V/aM: VDE 0636-2011
- Rated voltage 400V/gF: PN-IEC 60269-2
- Rated voltage 400V/gTr: VDE 0636-2011

Short description of constituent parts for NV/NH fuse-links

The body of the fuse-link is made of quality steatite which is highly resistant against temperature overloads.

In the inner part of the steatite body there is a copper melting element which is welded on a specially shaped inner part of the contact knife by spot welding. By careful shaping of this part we achieved that during assembly the melting element is placed exactly into the middle of the inner place. The remaining inside place of the ceramic body is filled up with precisely determined granulation and chemical structure quartz sand. All contact knives are additionally protected with a layer of silver or on special order of nickel. On the base of cyclic tests we have proved that the fusing characteristics are very stable and the tolerance on the current axis can be up to $\pm 10\%$.

Fuse-link NV/NH gG

Rated current
2-1600 A

Breaking capacity
120 kA / 100 kA

Rated voltage
400, 500, 690 V



NV/NH 00C KOMBI gG

Rated current [A]	~ 400V 100 kA	Code No. ~ 500V 120 kA	~ 690V 100 kA	Korrosionsfest ~ 400V 100 kA	Weight [g]	Packaging [pcs]
2	004181101	004181201	004181301	004181118	125	3/120
4	004181102	004181202	004181302	004181119	125	3/120
6	004181103	004181203	004181303	004181120	125	3/120
10	004181104	004181204	004181304	004181121	125	3/120
16	004181105	004181205	004181305	004181122	125	3/120
20	004181106	004181206	004181306	004181123	125	3/120
25	004181107	004181207	004181307	004181138	125	3/120
32	004181108	004181208	004181308	004181139	125	3/120
35	004181109	004181209	004181309	004181140	125	3/120
40	004181110	004181210	004181310	004181141	125	3/120
50	004181111	004181211	004181311	004181142	125	3/120
63	004181112	004181212		004181143	125	3/120
80	004181113	004181213		004181130	125	3/120
100	004181114	004181214		004181131	125	3/120
125		004181215			125	3/120
160	004181216				125	3/120

Low voltage NH knife-blade fuse-links

NV/NH 00 CI KOMBI gG*

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 100 kA	~ 500V 120 kA	~ 690V 100 kA		
2	004191101	004191201	004191301	125	3/120
4	004191102	004191202	004191302	125	3/120
6	004191103	004191203	004191303	125	3/120
10	004191104	004191204	004191304	125	3/120
16	004191105	004191205	004191305	125	3/120
20	004191106	004191206	004191306	125	3/120
25	004191107	004191207	004191307	125	3/120
32	004191108	004191208	004191308	125	3/120
35	004191109	004191209	004191309	125	3/120
40	004191110	004191210	004191310	125	3/120
50	004191111	004191211	004191311	125	3/120
63	004191112	004191212		125	3/120
80	004191113	004191213		125	3/120
100	004191114	004191214		125	3/120
125				125	3/120
160				125	3/120

* INSULATED

NV/NH 00 C gG with striker pin

Rated current [A]	Code No.		Weight [g]	Packaging [pcs]
	~ 690 V 100 kA			
2	004111172		135	3
4	004111173		135	3
6	004111174		135	3
10	004111175		135	3
16	004111176		135	3
20	004111177		135	3
25	004111178		135	3
32	004111179		135	3
35	004111180		135	3
40	004111181		135	3

NV/NH 00 KOMBI gG

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
63			004182312		173	3/90
80			004182313		173	3/90
100			004182314		173	3/90
125	004182115	004182215	004182315	004182118	173	3/90
160	004182116	004182216		004182119	173	3/90

NV/NH 00 I KOMBI gG*

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA		
63			004192312	173	3/90
80			004192313	173	3/90
100			004192314	173	3/90
125	004192115	004192215	004192315	173	3/90
160	004192116	004192216		173	3/90

* INSULATED



**NV/NH 00 gG with striker pin**

Rated current [A]	Code No. ~ 690 V 100 kA	Weight [g]	Packaging [pcs]
50	004111182	205	3
63	004111183	205	3
80	004111184	205	3
100	004111185	205	3
125	004111186	205	3

**NV/NH 0 KOMBI gG**

Rated current [A]	Code No.		Weight [g]	Packaging [pcs]
	~ 500 V 120 kA	~690 V 100 kA		
6	004183203	004183303	226	3/45
10	004183204	004183304	226	3/45
16	004183205	004183305	226	3/45
20	004183206	004183306	226	3/45
25	004183207	004183307	226	3/45
32	004183208	004183308	226	3/45
35	004183209	004183309	226	3/45
40	004183210	004183310	226	3/45
50	004183211	004183311	226	3/45
63	004183212	004183312	226	3/45
80	004183213	004183313	226	3/45
100	004183214	004183314	226	3/45
125	004183215	004183315	226	3/45
160	004183216		226	3/45

NV/NH 1 C KOMBI gG

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
25	004184107	004184207	004184307	004184131	233	3/45
32	004184108	004184208	004184308	004184130	233	3/45
35	004184109	004184209	004184309	004184129	233	3/45
40	004184110	004184210	004184310	004184128	233	3/45
50	004184111	004184211	004184311	004184127	233	3/45
63	004184112	004184212	004184312	004184138	233	3/45
80	004184113	004184213	004184313	004184139	233	3/45
100	004184114	004184214	004184314	004184132	233	3/45
125	004184115	004184215	004184315	004184133	233	3/45
160	004184116	004184216		004184134	233	3/45

Low voltage NH knife-blade fuse-links

NV/NH 1C I KOMBI gG*

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA		
25	004194107	004194207	004194307	233	3/45
32	004194108	004194208	004194308	233	3/45
35	004194109	004194209	004194309	233	3/45
40	004194110	004194210	004194310	233	3/45
50	004194111	004194211	004194311	233	3/45
63	004194112	004194212	004194312	233	3/45
80	004194113	004194213	004194313	233	3/45
100	004194114	004194214	004194314	233	3/45
125	004194115	004194215	004194315	233	3/45
160	004194116	004194216		233	3/45

* INSULATED

NV/NH 1 KOMBI gG

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
63	004184120	004184220	004184320		430	3/24
80	004184121	004184221	004184321		430	3/24
100	004184122	004184222	004184322		430	3/24
125	004184123	004184223	004184323		430	3/24
160	004184124	004184224	004184324		430	3/24
200	004184117	004184217	004184317	004184135	430	3/24
224	004184118	004184218	004184318	004184136	430	3/24
250	004184119	004184219	004184319	004184137	430	3/24

NV/NH 1 I KOMBI gG*

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA		
63	004194120	004194220	004194320	430	3/24
80	004194121	004194221	004194321	430	3/24
100	004194122	004194222	004194322	430	3/24
125	004194123	004194223	004194323	430	3/24
160	004194124	004194224	004194324	430	3/24
200	004194117	004194217	004194317	430	3/24
224	004194118	004194218	004194318	430	3/24
250	004194119	004194219	004194319	430	3/24

* INSULATED



**NV/NH 1 gG with striker pin**

Rated current [A]	Code No. ~ 690 V 100 kA	Weight [g]	Packaging [pcs]
63	004113340	452	3
80	004113341	452	3
100	004113342	452	3
125	004113343	452	3
160	004113344	452	3
200	004113345	452	3
224	004113346	452	3
250	004113347	452	3

NV/NH 2 C KOMBI gG

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
63	004185112	004185212	004185312	004185144	430	3/15
80	004185113	004185213	004185313	004185145	430	3/15
100	004185114	004185214	004185314	004185146	430	3/15
125	004185115	004185215	004185315	004185147	430	3/15
160	004185116	004185216	004185316	004185133	430	3/15
200	004185117	004185217	004185317	004185134	430	3/15
224	004185118	004185218	004185318	004185135	430	3/15
250	004185119	004185219	004185319	004185136	430	3/15

**NV/NH 2 CI KOMBI gG***

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA		
63	004195112	004195212	004195312	430	3/15
80	004195113	004195213	004195313	430	3/15
100	004195114	004195214	004195314	430	3/15
125	004195115	004195215	004195315	430	3/15
160	004195116	004195216	004195316	430	3/15
200	004195117	004195217	004195317	430	3/15
224	004195118	004195218	004195318	430	3/15
250	004195119	004195219	004195319	430	3/15

* INSULATED

Low voltage NH knife-blade fuse-links

NV/NH 2 KOMBI gG

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
280	004185120	004185220	004185320	004185137	500	3/15
300	004185121	004185221	004185321	004185138	500	3/15
315	004185122	004185222	004185322	004185139	500	3/15
355	004185123	004185223		004185140	500	3/15
400	004185124	004185224		004185141	500	3/15

NV/NH 2 I KOMBI gG*

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA		
280	004195120	004195220	004195320	500	3/15
300	004195121	004195221	004195321	500	3/15
315	004195122	004195222	004195322	500	3/15
355	004195123	004195223		500	3/15
400	004195124	004195224		500	3/15

* INSULATED

NV/NH 2 gG with striker pin

Rated current [A]	Code No. ~ 690 V 100 kA	Weight [g]	Packaging [pcs]
160	004114345	593	3
200	004114346	593	3
224	004114347	593	3
250	004114348	593	3
300	004114349	593	3
315	004114350	593	3

NV/NH 3 C KOMBI gG

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
250	004186119	004186219	004186319	004186150	510	3/12
280	004186120	004186220	004186320		510	3/12
300	004186121	004186221	004186321	004186140	510	3/12
315	004186122	004186222	004186322	004186141	510	3/12
355	004186123	004186223		004186142	510	3/12
400	004186124	004186224		004186143	510	3/12



**NV/NH 3 KOMBI gG**

Rated current [A]	Code No.			Korrosionsfest ~ 400V 120 kA	Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA			
355			004186328		923	3/12
400			004186329		923	3/12
425	004186130	004186230	004186330	004186144	923	3/12
500	004186131	004186231	004186331	004186145	923	3/12
560	004186132	004186232			923	3/12
630	004186133	004186233		004186147	923	3/12

NV/NH 3 I KOMBI gG*

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 400V 120 kA	~ 500V 120 kA	~ 690V 100 kA		
200	004196123	004196223	004196323	923	3/12
224	004196124	004196224	004196324	923	3/12
250	004196125	004196225	004196325	923	3/12
300	004196126	004196226	004196326	923	3/12
315	004196127	004196227	004196327	923	3/12
355	004196128	004196228	004196328	923	3/12
400	004196129	004196229	004196329	923	3/12
425	004196130	004196230	004196330	923	3/12
500	004196131	004196231	004196331	923	3/12
560	004196132	004196232		923	3/12
630	004196133	004196233		923	3/12

* INSULATED

**NV/NH 3 gG with striker pin**

Rated current [A]	Code No. ~ 690 V 100 kA	Weight [g]	Packaging [pcs]
250	004115120	895	3
300	004115121	895	3
315	004115122	895	3
400	004115123	895	3
425	004115124	895	3
500	004115125	895	3

NV/NH 4 gG

Rated current [A]	Code No. ~ 500 V 120 kA	Weight [g]	Packaging [pcs]
630	004116101	2130	1/12
710	004116102	2130	1/12
800	004116103	2130	1/12
900	004116105	2130	1/12
1000	004116104	2130	1/12
1250	004116106	2130	1/12



Low voltage NH knife-blade fuse-links

NV/NH 4a gG

Rated current [A]	Code No.			Weight [g]	Packaging [pcs]
	~ 500 V, 120 kA		~ 690 V		
	SI		100 kA		
630	004116108	004176026	004176105	2170	1/12
710	004116109	004176027	004176106	2170	1/12
800	004116110	004176028	004176107	2170	1/12
900	004116111	004176029	004176108	2170	1/12
1000	004116112	004176030	004176109	2170	1/12
1250	004116113	004176031	004176110	2170	1/12
1500	004116119	004176032		2170	1/12
1600	004116120	004176033		2170	1/12

NV/NH 4a gG with striker pin

Rated current [A]	Code No. ~ 690 V 100 kA	Weight [g]	Packaging [pcs]
500	004116186	2835	1
630	004116187	2835	1
800	004116188	2835	1
1000	004116189	2835	1
1250	004116190	2835	1

NV/NH 1 1000 V a.c. gG

Rated current	Code No. ~1000V 50 kA	Weight	Packaging
[A]		[g]	[pcs]
10	004113703	487	3/24
16	004113704	487	3/24
20	004113705	487	3/24
25	004113706	487	3/24
32	004113707	487	3/24
35	004113708	487	3/24
40	004113710	487	3/24
50	004113711	487	3/24
63	004113712	487	3/24
80	004113713	487	3/24
100	004113714	487	3/24
125	004113715	487	3/24
160	004113716	487	3/24
200	004113717	487	3/24



Fuse-link NV/NH aM

Rated current
2-1250 ABreaking capacity
100 kA / 120 kARated voltage
500V, 690 V

Fuse-links with aM characteristics are intended for protection of switchgears and controlgears as well as motors in motor drives where gG characteristics do not comply with all requirements of successful protection of these devices. They are made in all standard NV sizes from 00 to 4a for all standard rated currents and for voltages to 690 V. Their main duty is to enable a full usage of switchgears and controlgears in the region of starting currents and to prevent sparking or destruction of protective contacts in case of short-circuit currents. It should be noted that these fuse-links are intended only for protection in the limited region (in the region of short-circuit currents).



NV/NH fuse-link aM

Rated current [A]	Code No. ~ 690 V, 100 kA							
	NV 00 C kombi	NV 00 kombi	NV 0	NV 1 kombi	NV 2 C kombi	NV 2 kombi	NV3 kombi	NV4a
2	004181401							
4	004181402							
6	004181403							
10	004181404			004184425				
16	004181405		004112125**	004184426				
20	004181406		004112126**	004184427				
25	004181407		004112127**	004184428				
32	004181408		004112128**					
35	004181409		004112129**	004184429	004185429			
40	004181410		004112130**	004184430	004185430			
50	004181411	004182411	004112131**	004184431	004185431			
63	004181412	004182412	004112132**	004184420	004185412			
80	004181413*	004182413	004112133**	004184421	004185413			
100	004181414*	004182414	004112134**	004184422	004185414			
125		004111735**	004112135**	004184423	004185415			
160		004111736**	004112136**	004184424	004185416	004185425		
200				004184417	004185417	004185426		
224				004184418	004185418	004185427		
250				004184419	004185419	004185428		
280						004185420		
300						004185421		
315						004185422		
355						004185423	004186428	
400						004185424	004186429	
425							004186430	
500							004186431	
630							004186432**	004187432**
710								004187433**
800								004187434**
900								004187435**
1000								004187436**
1250								004187437**

Weight and Packaging the same as for gG fuse-links.

*500V, 120 kA

** NOT in KOMBI version

Technical data


Fuse Links NV/NH

Electrical characteristics

Rated voltage U_n	400 V AC, 500 V AC, 690 V AC
Rated current I_n	2 - 1600 A
Breaking capacity U_n	120 kA, 100 kA, 50 kA
Melting characteristic	gG, aM, gF, gTr
Certified	DIN VDE0636-201 (1998-06)
In accordance with	IEC 60269-1:2005 / EN 60269-1:1998+A1:2005 IEC 60269-2:1986+Corr.1:1996+A1:1995+A2:2001 / EN 60269-2:1995+A1:1998+A2:2002 IEC 60269-2-1:2004 / HD 60269-2-1:2005
Dimensions according to	DIN43620 Part: 1 - 4
Two versions of covers	aluminium and plastic



Fuse Links NV/NH gG Dimensions

Type	Dimensions											
	A	B	C	D	E	F	G	H	I	J	K	
NV00C	79	53	47	35	15	21	52	7,5			6	kombi
NV00C I	79	53	47	35	15	21	52	7,5			6	kombi
NV00	79	53	47	35	15	28	56	12			6	kombi
NV00 I	79	53	47	35	15	28	56	12			6	kombi
NV0	125	68	65	35	15	28	56	12			6	kombi
NV1C	135	68	65	40	15	28	61	12			6	kombi
NV1C I	135	68	65	40	15	28	61	12			6	kombi
NV1	135	72	65	40	20	46	65	14			6	kombi
NV1 I	135	72	65	40	20	46	65	14			6	kombi
NV2C	150	72	65	48	20	46	73	14			6	kombi
NV2C I	150	72	65	48	20	46	73	14			6	kombi
NV2	150	72	65	48	26	54	73	14			6	kombi
NV2 I	150	72	65	48	26	54	73	14			6	kombi
NV3C	150	72	65	60	26	54	84	14			6	kombi
NV3	150	72	65	60	33	65	84	14			6	kombi
NV4	200	75	66	87	50	100	121	24	150	16	8	
NV4a	200	99	87	85	50	95	121	27			6	
NV4a SI*	200	99	87	85	50	95	121	27			6	

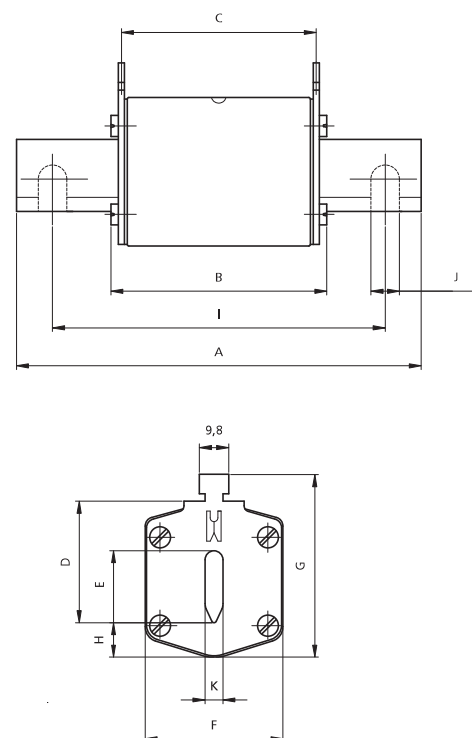

Fuse Links NV/NH gG with Striker Pin Dimensions


Type	Dimensions			
	K	L	M	S1
00C	0	20.7	16.7	7.5
00	0	20.7	16.7	7.5
1	13.7	19.7	25	12
2	16.2	27.4	25	12
3	17	35.6	25	12
4a	24	49	25	12

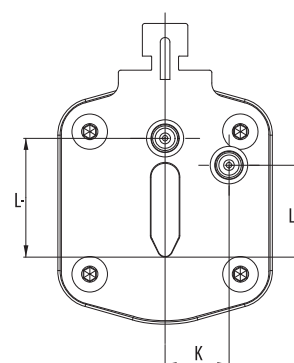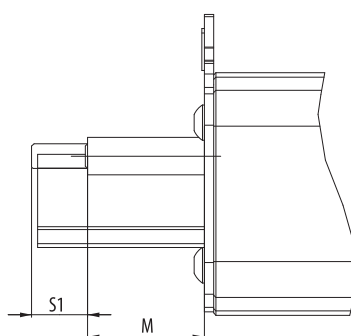

Fuse-link NV /NH gG characteristics


NH000 400V

Time current characteristics
I/t, gG

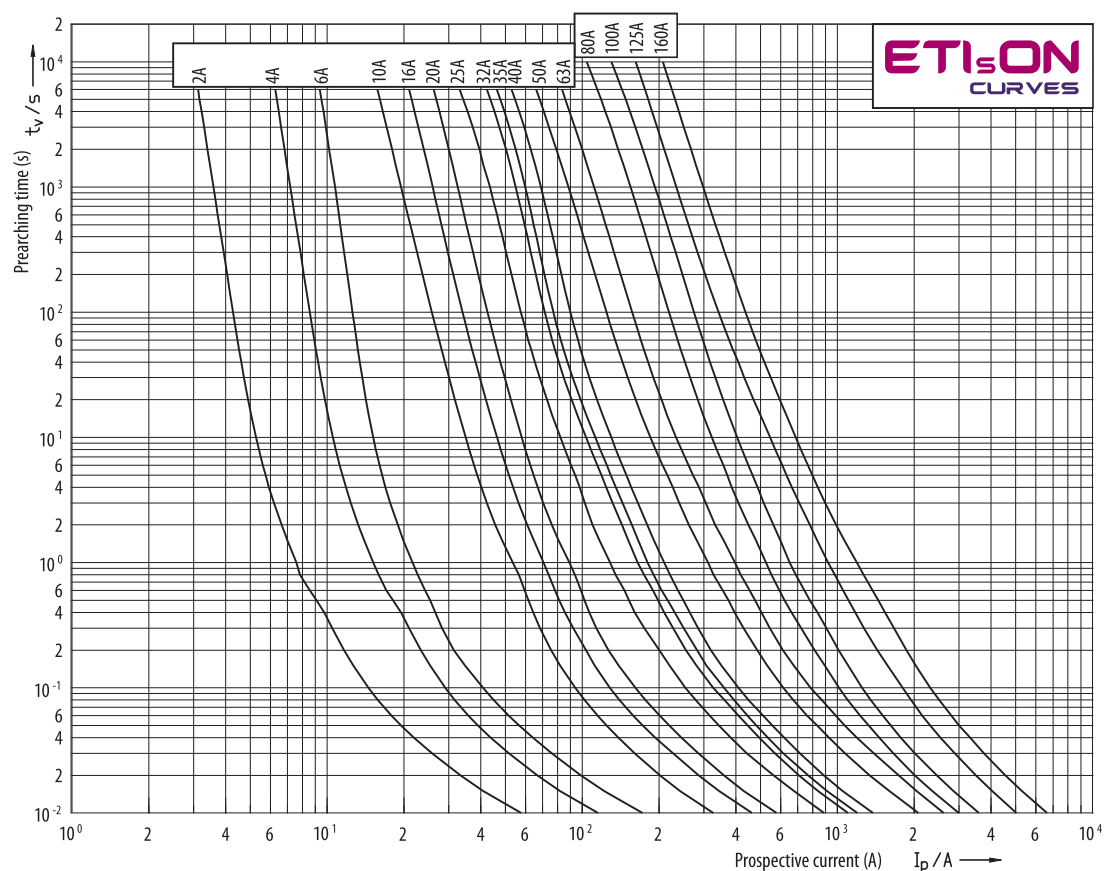


NH000 500V

Time current characteristics
I/t, gG

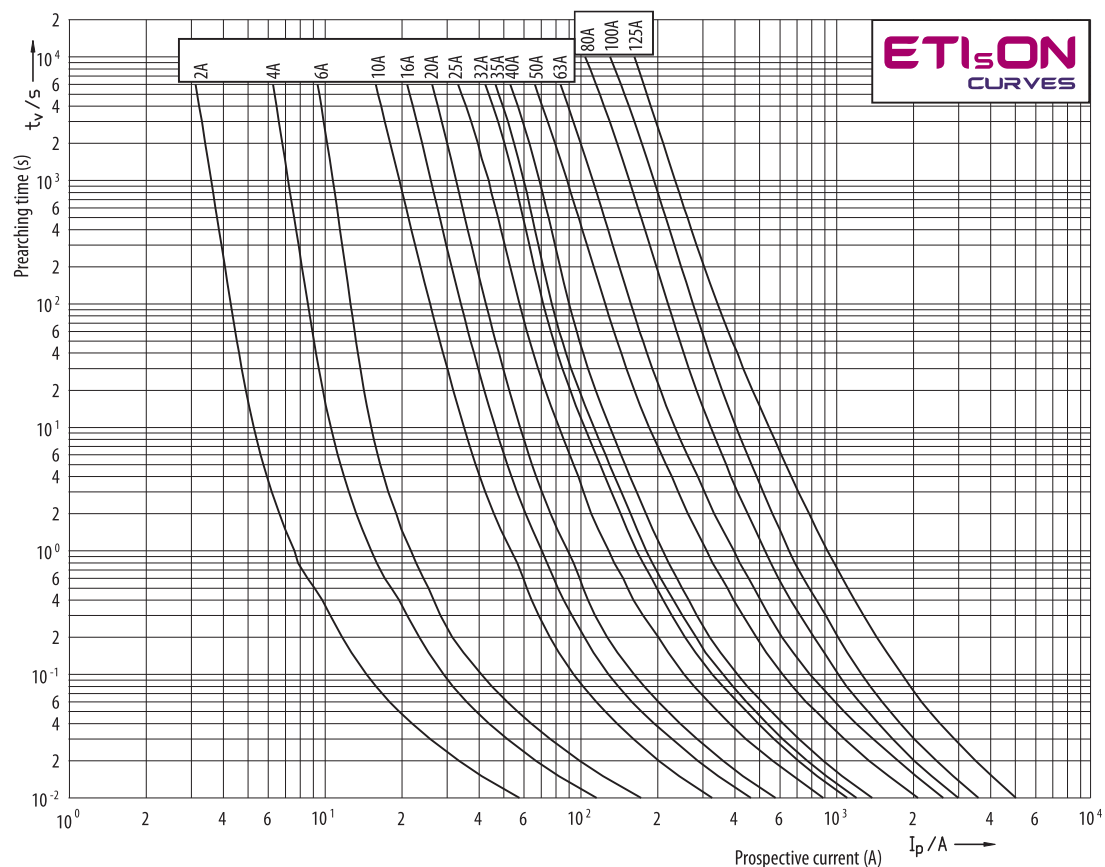


NH000 690V

Time current
characteristics
 $I/t, gG$

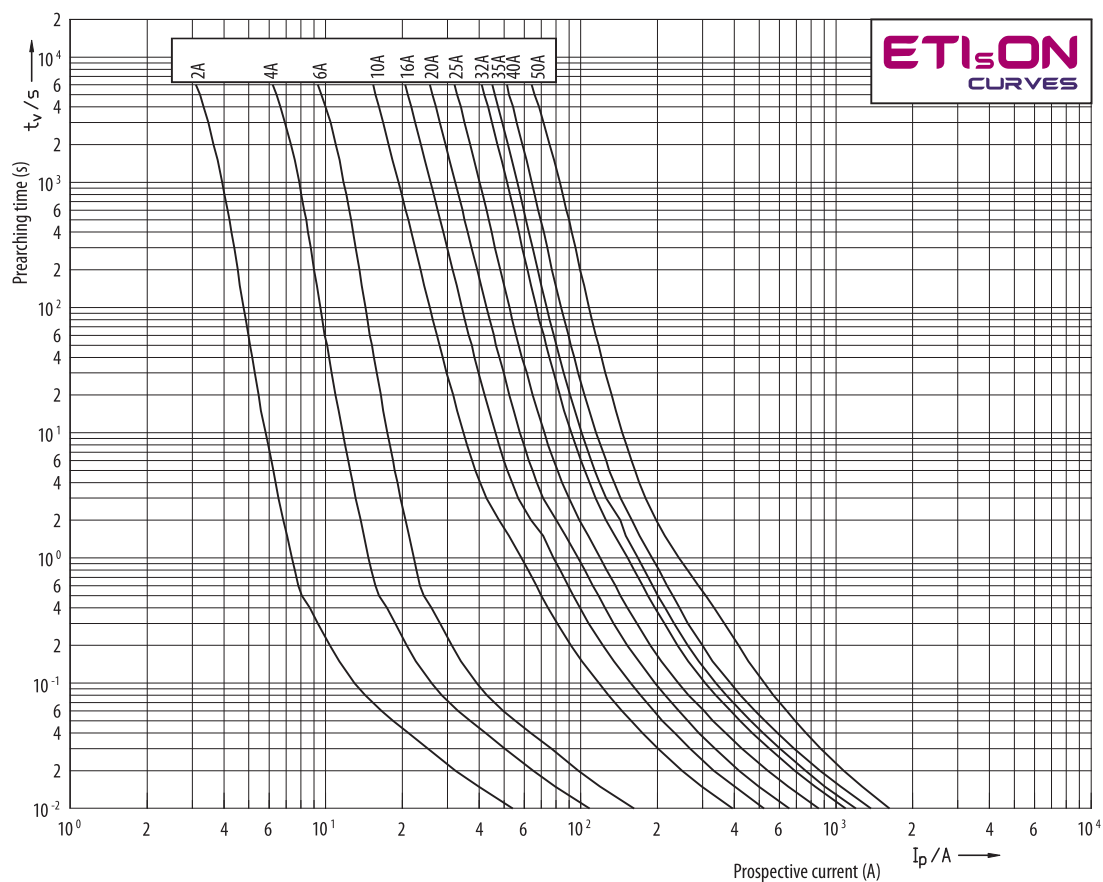
**NH00 400V**

Time current
characteristics
 $I/t, gG$

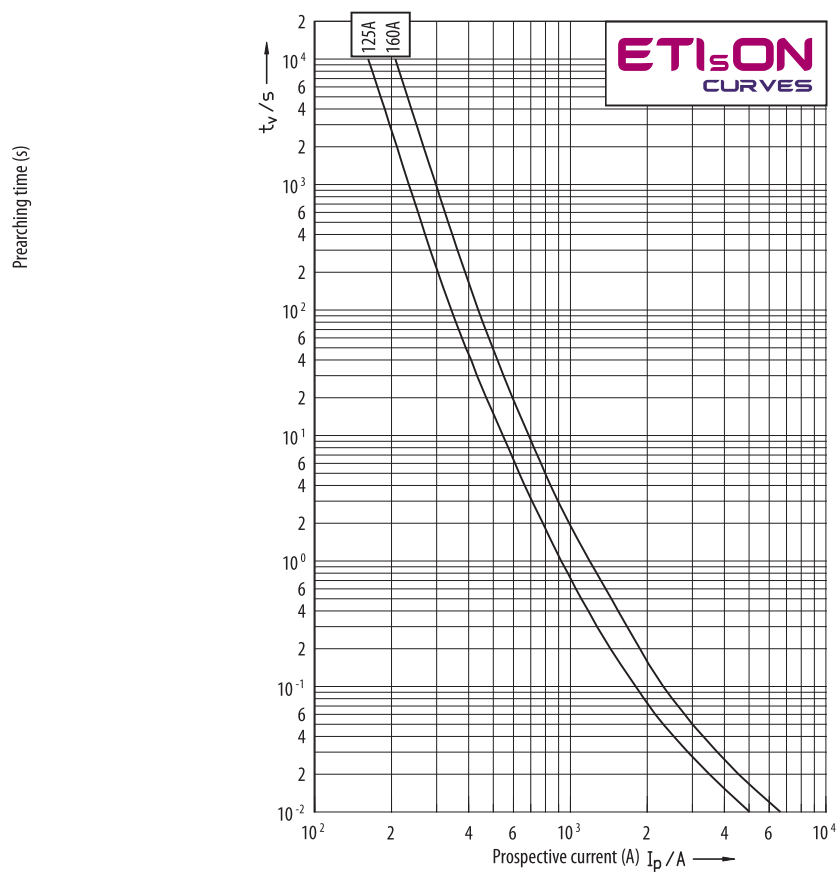


NH00 500V

Time current
characteristics
 $I/t, gG$

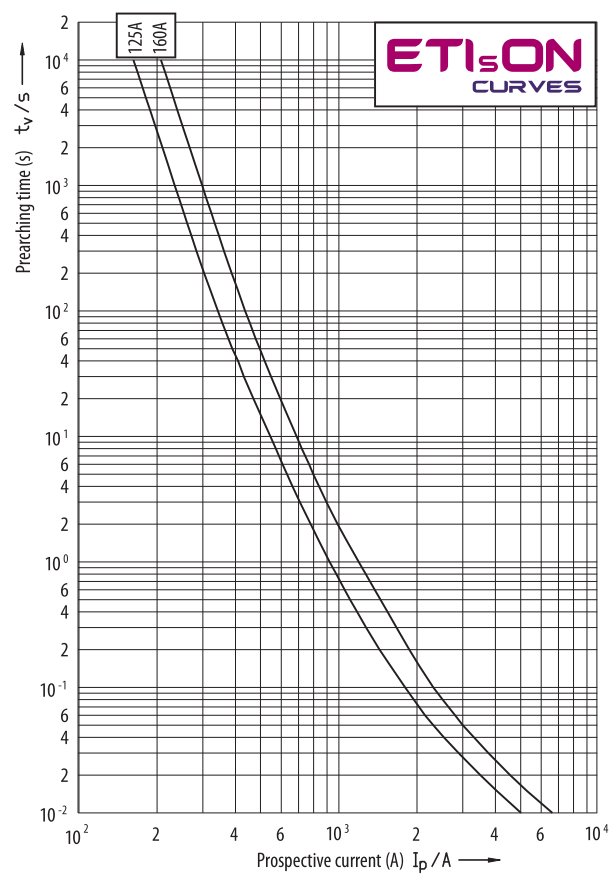


NH00 690V

Time current
characteristics
 $I/t, gG$

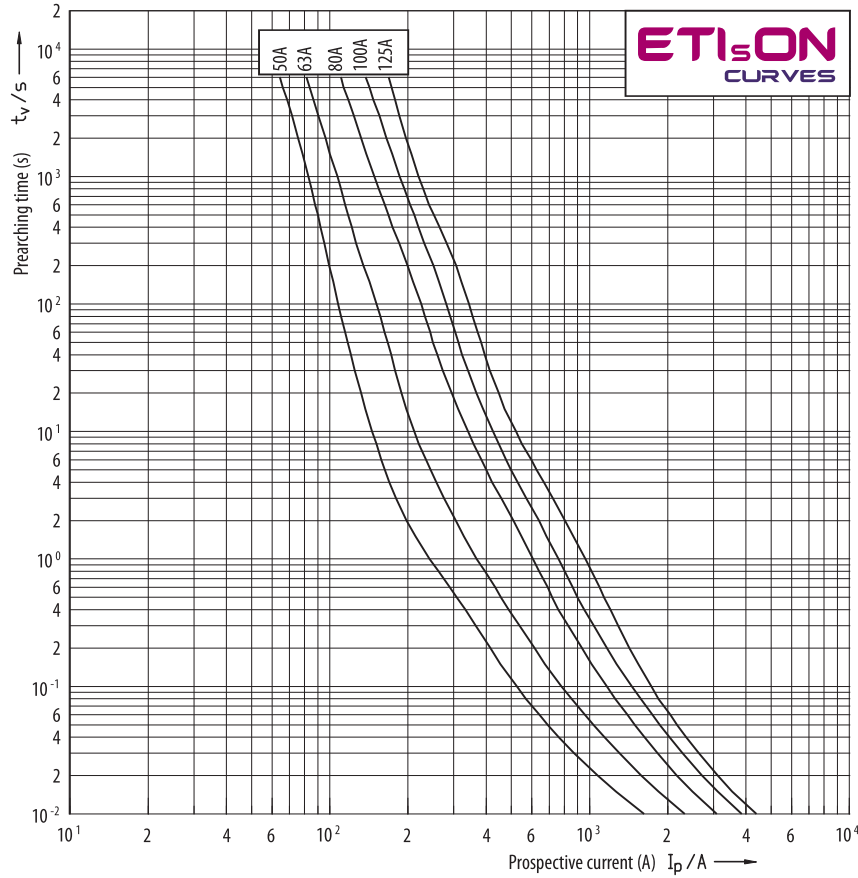


**NH0, NH1C
400V**

Time current
characteristics
 $I/t, gG$

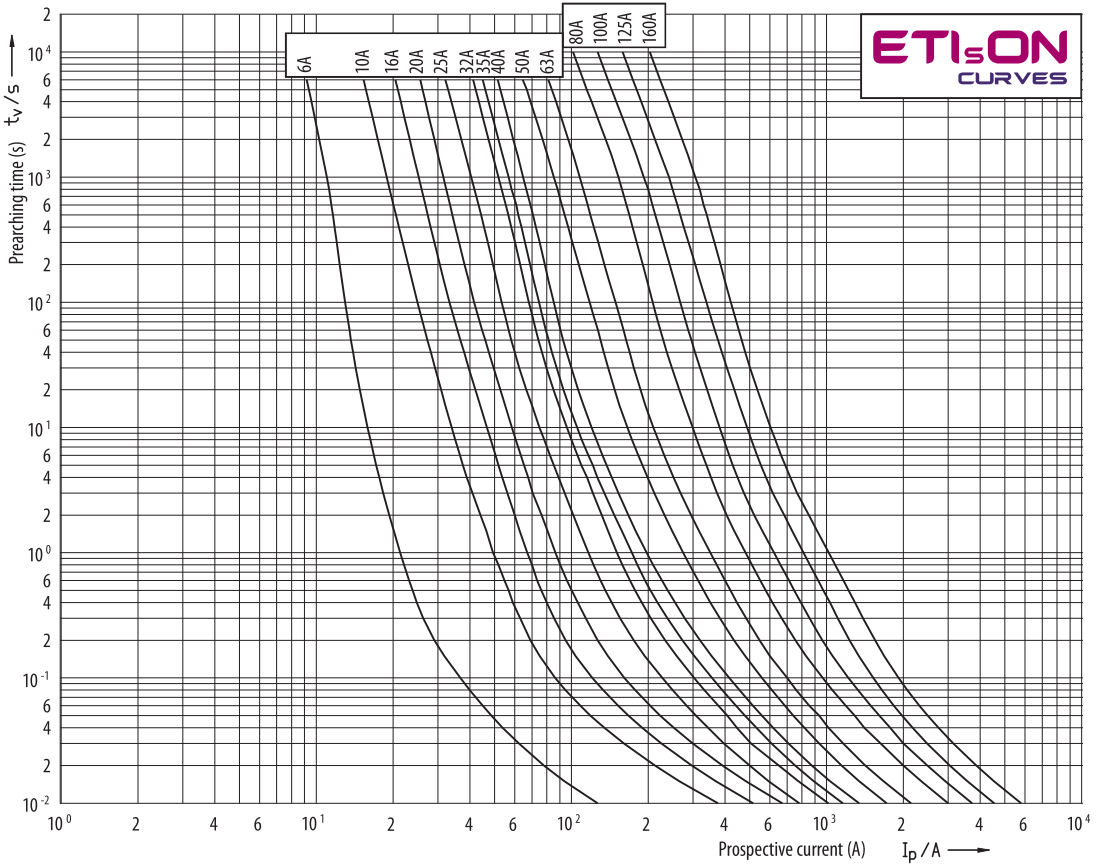


NH0, NH1C 500V

Time current
characteristics
 $I/t, gG$

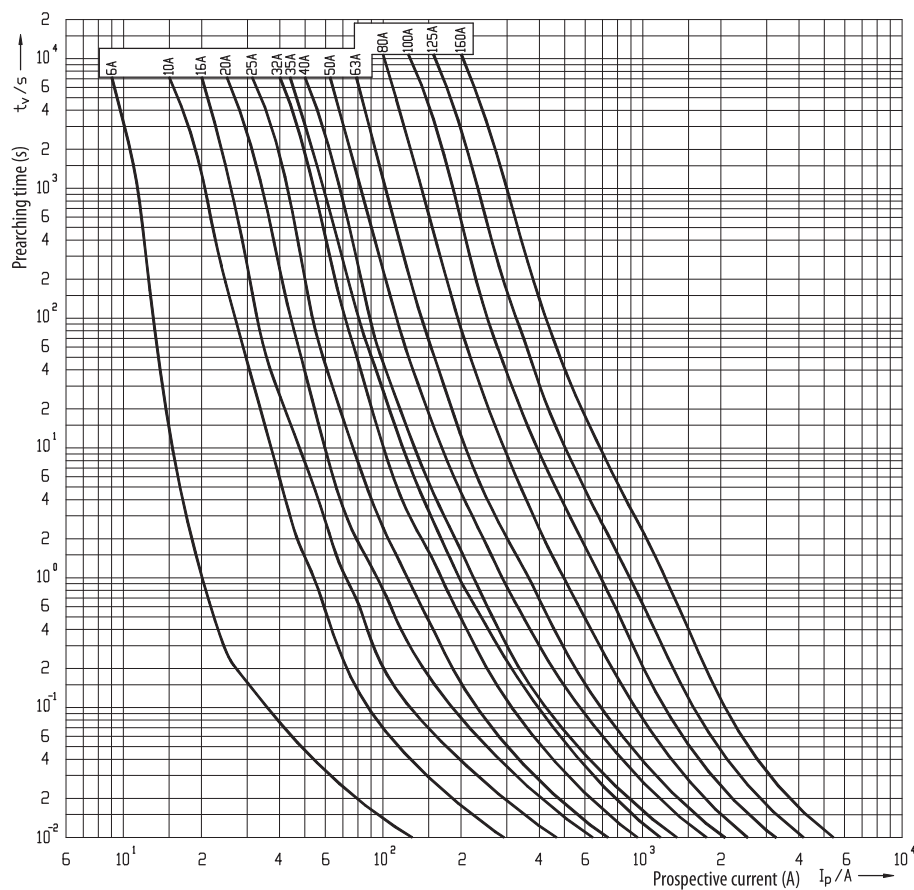


Cut-off current
characteristics

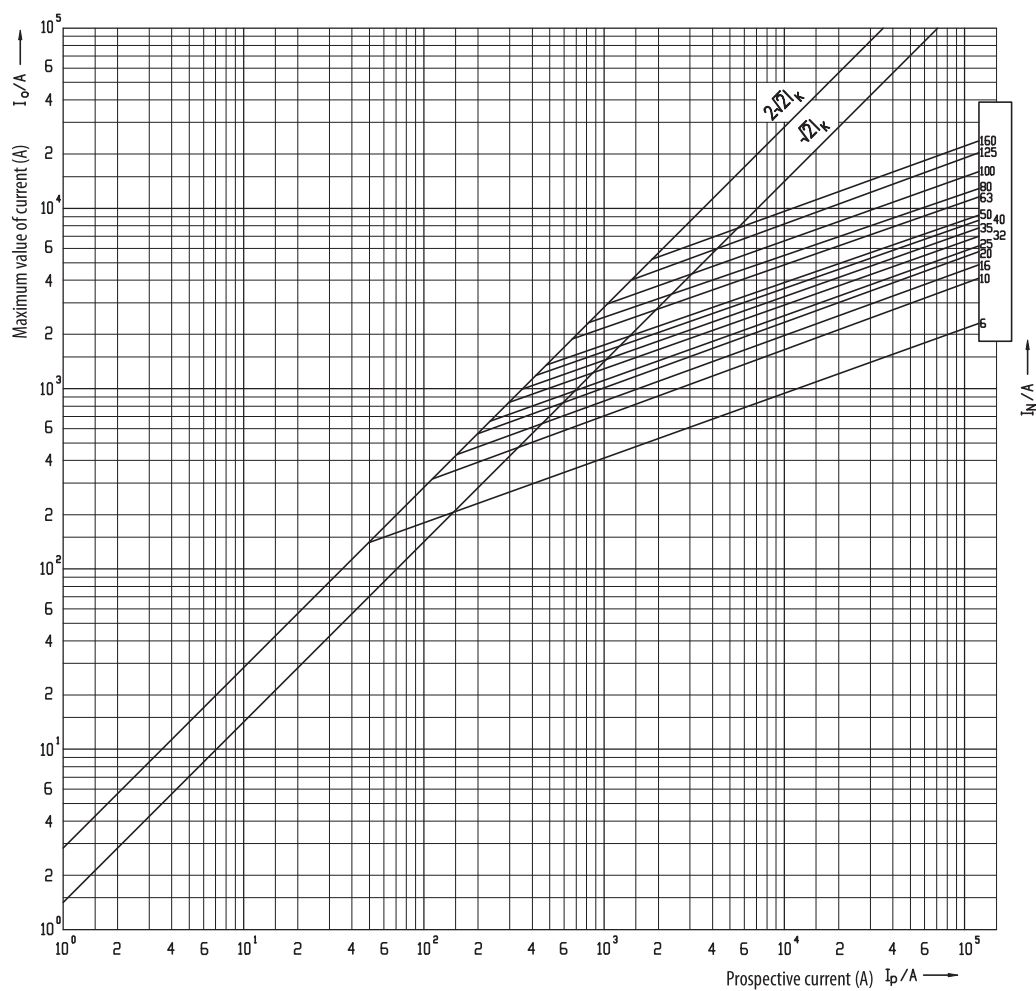


**NH0, NH1C
690V**

Time current
characteristics
 $I/t, gG$

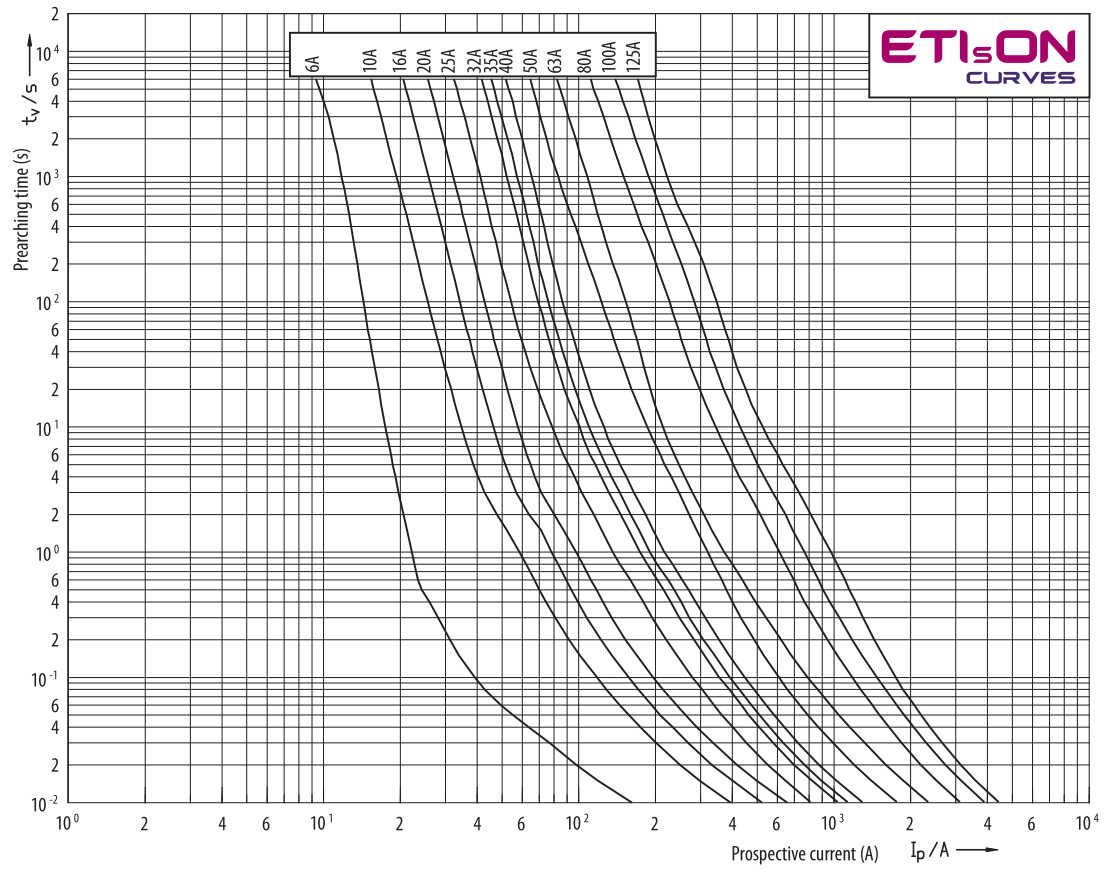


NH1 400V

Time current characteristics
I/t, gG

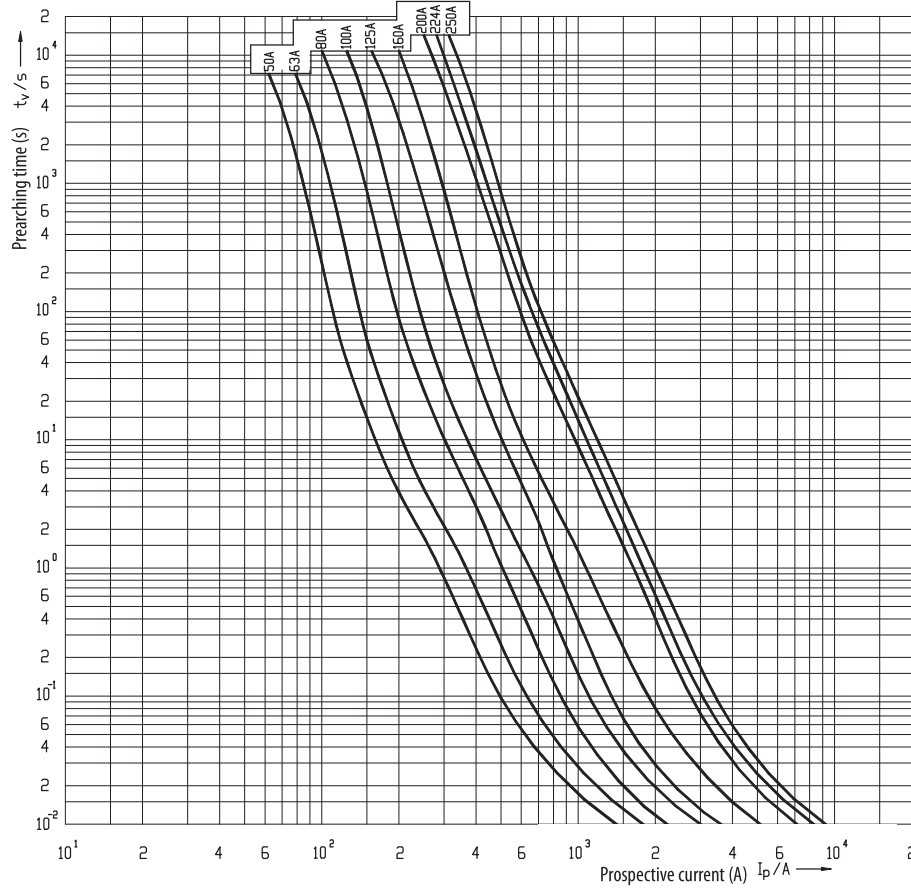


Cut-off current characteristics

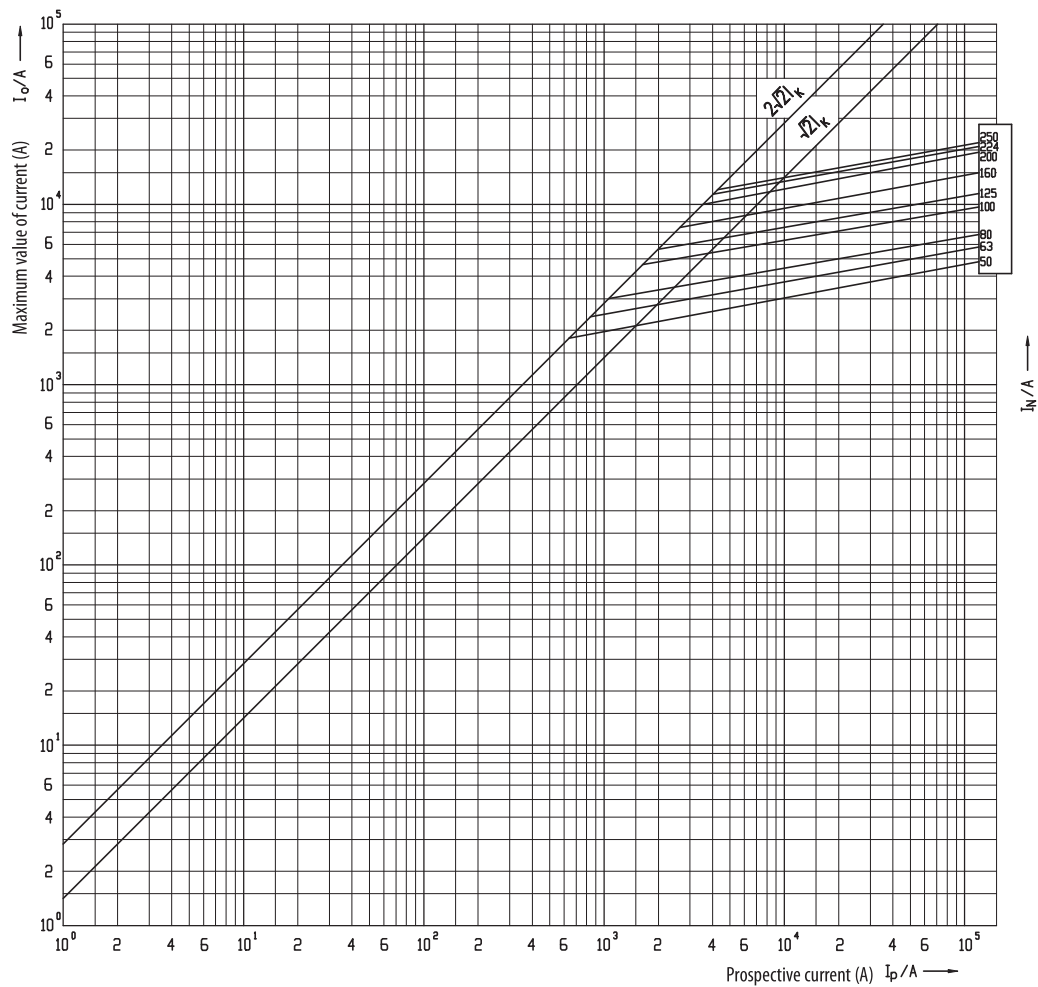


NH1 500V

Time current
characteristics
 $I/t, gG$

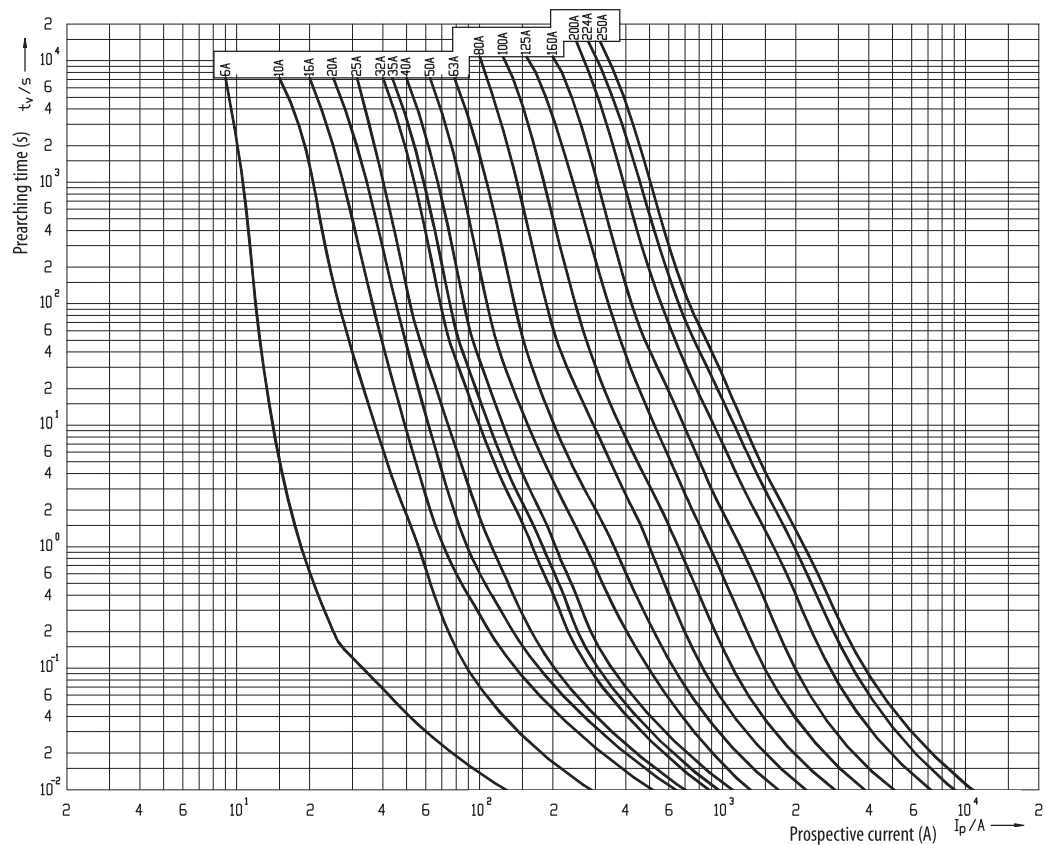


Cut-off current
characteristics

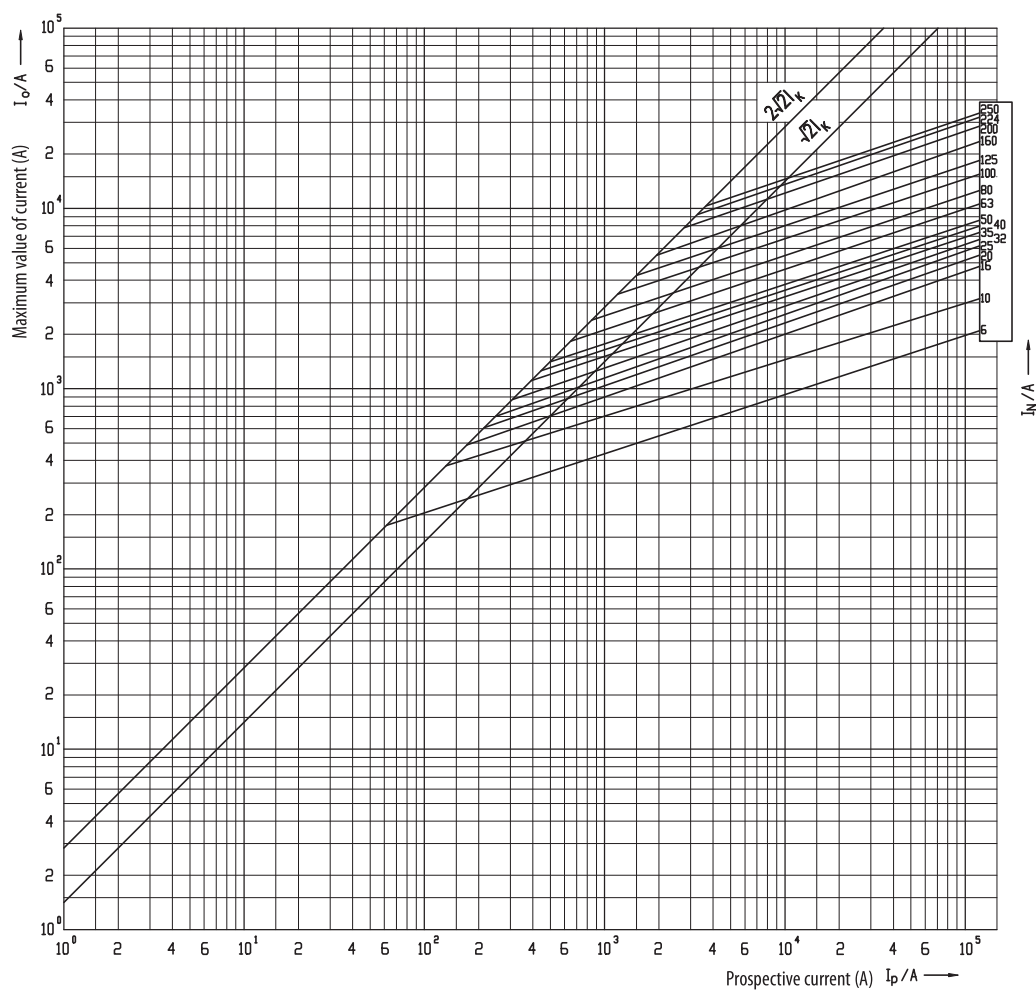


NH1 690V

Time current
characteristics
 I/t , gG

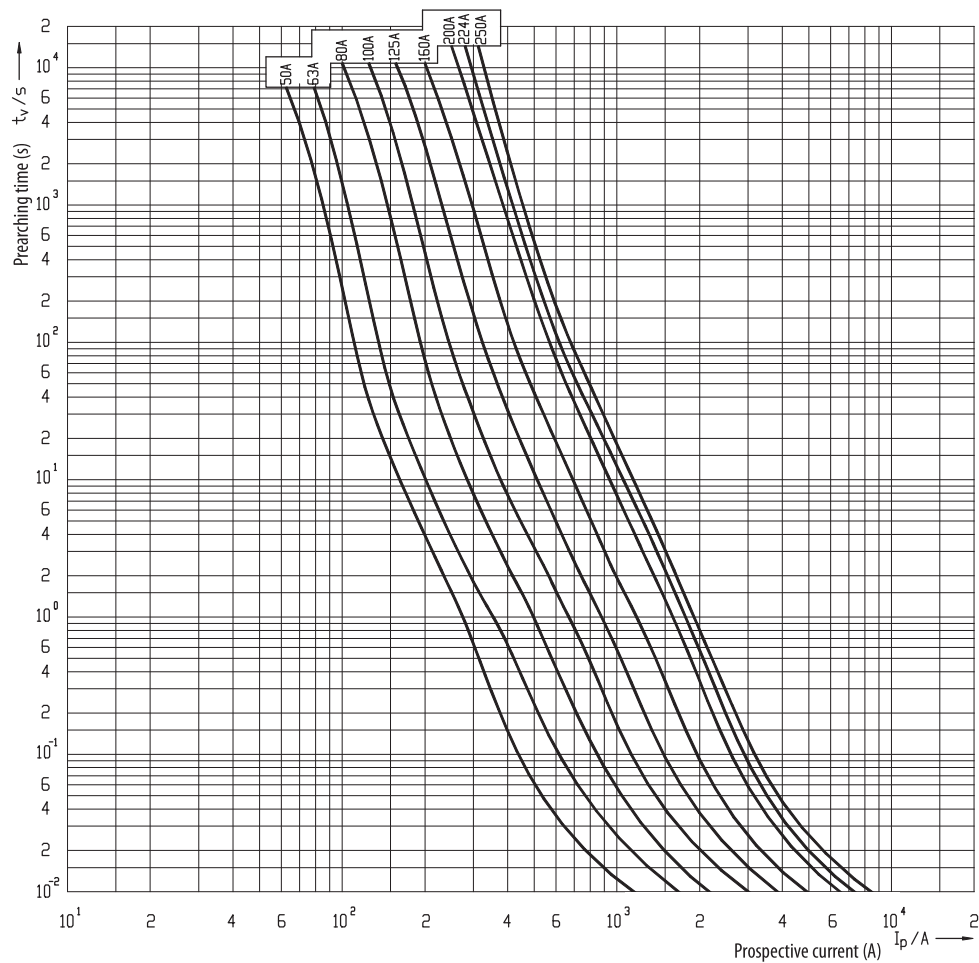


Cut-off current
characteristics

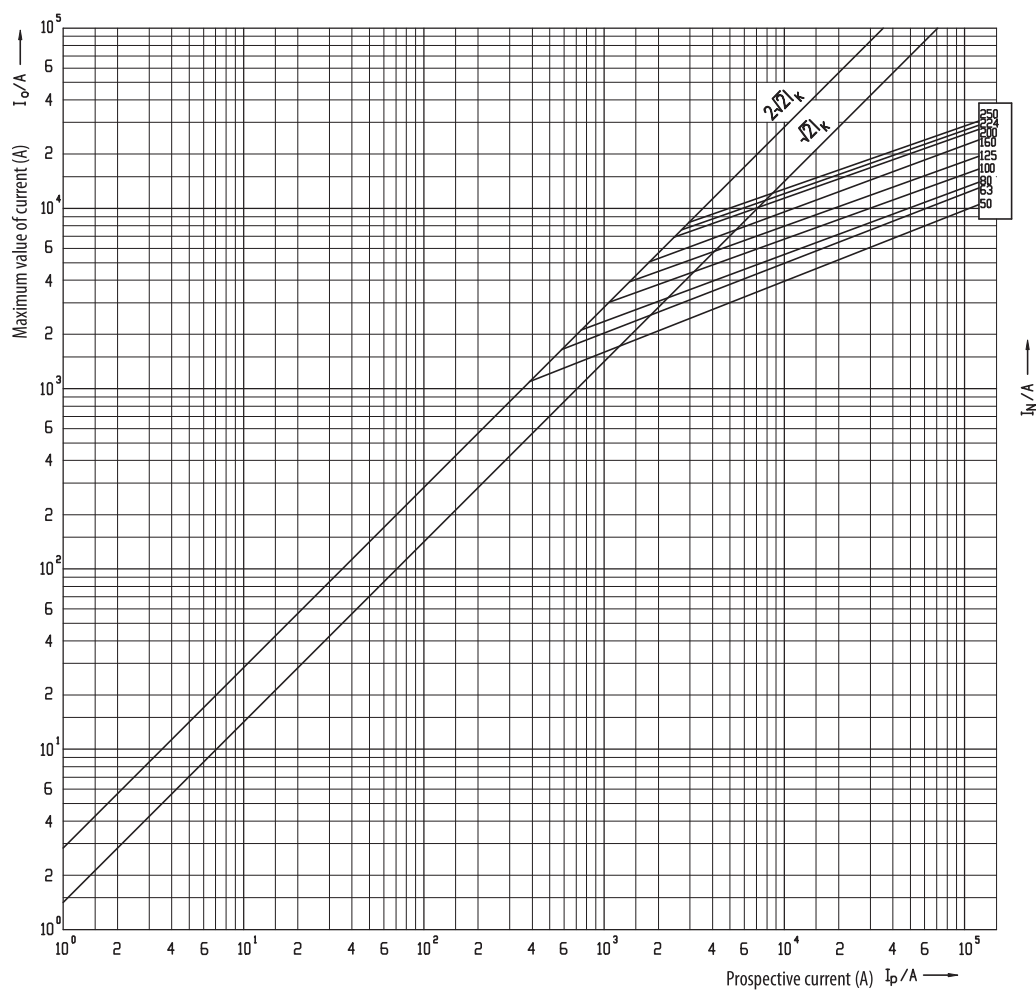


NH2C 400V

Time current characteristics
I/t, gG

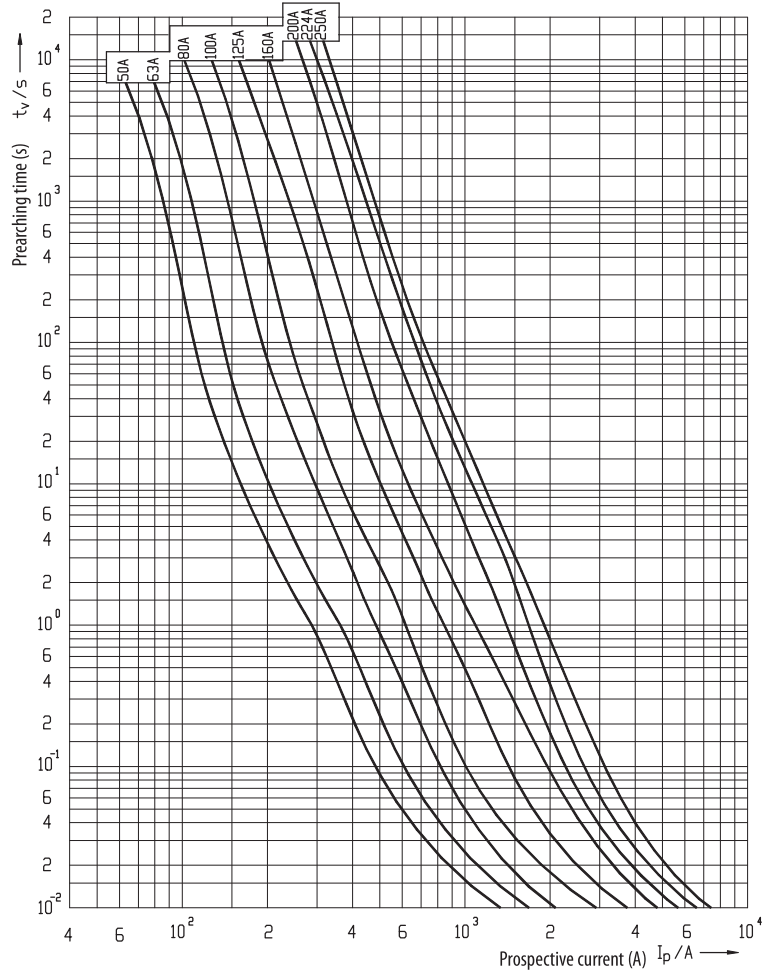


Cut-off current characteristics

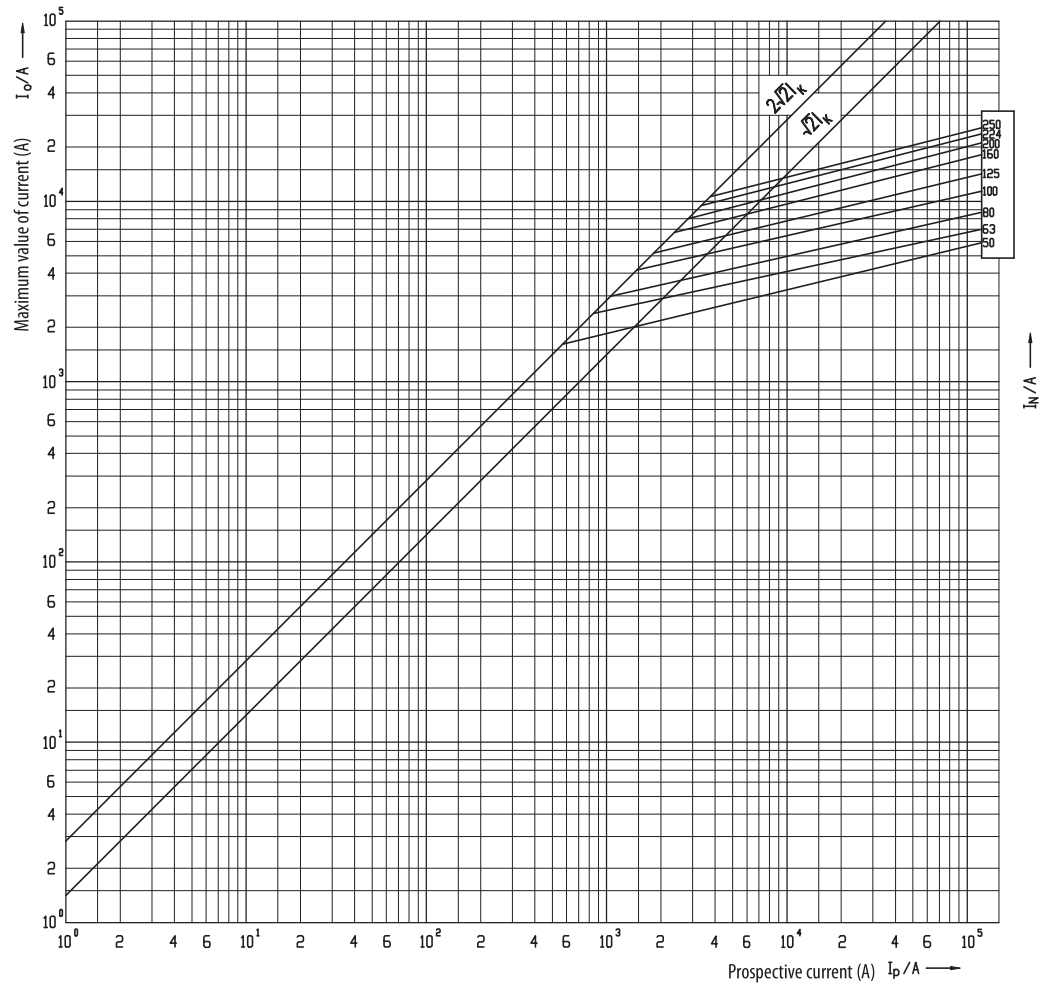


NH2C 500V

Time current characteristics
I/t, gG

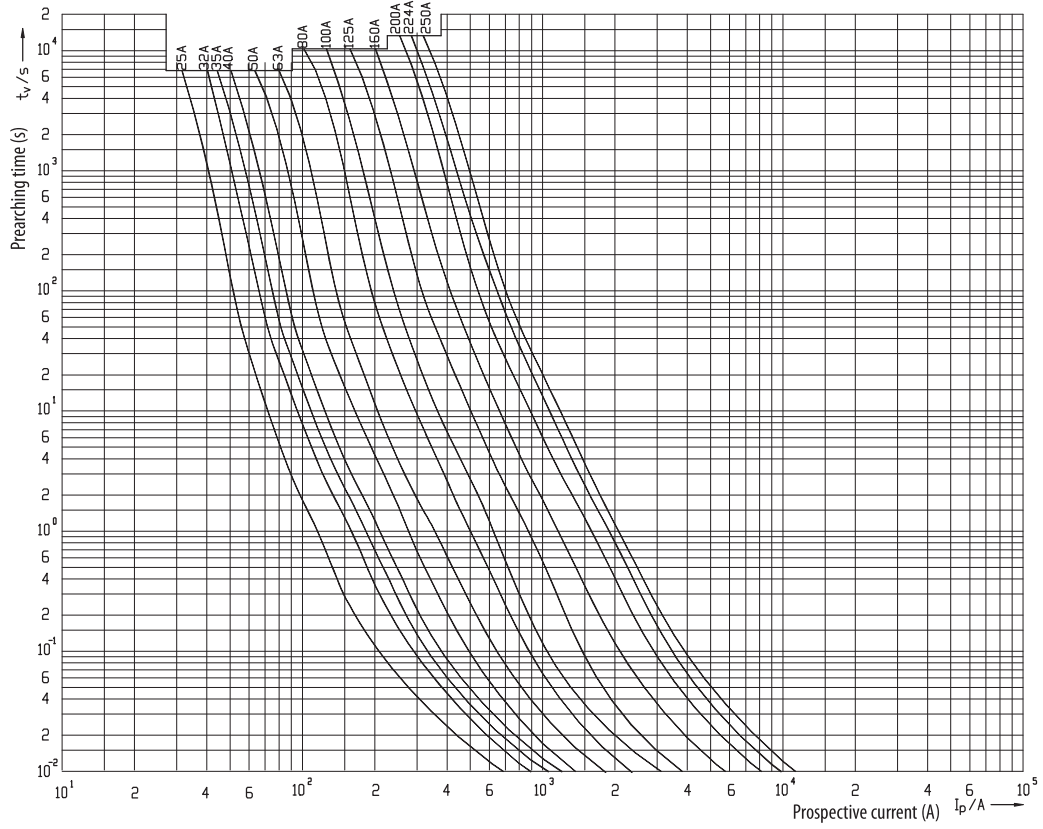


Cut-off current characteristics

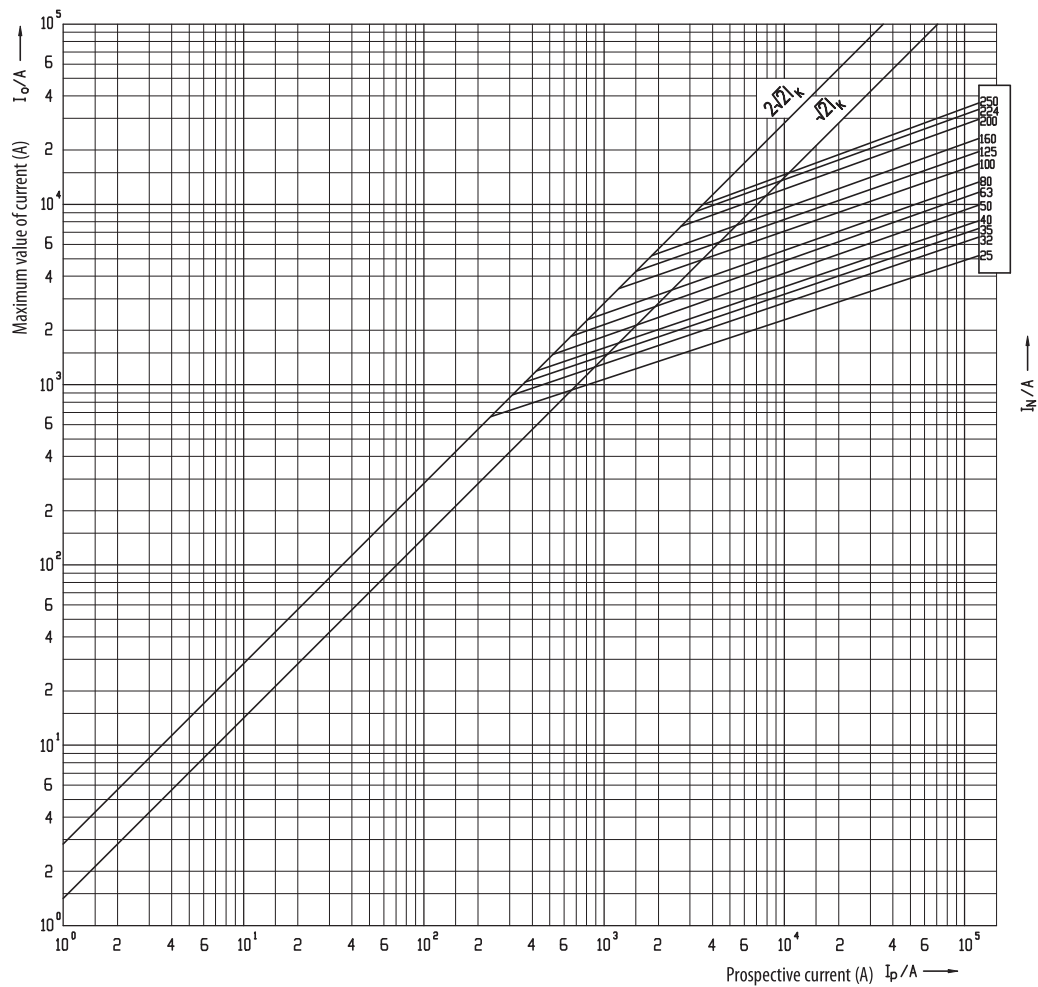


NH2C 690V

Time current characteristics
I/t, gG

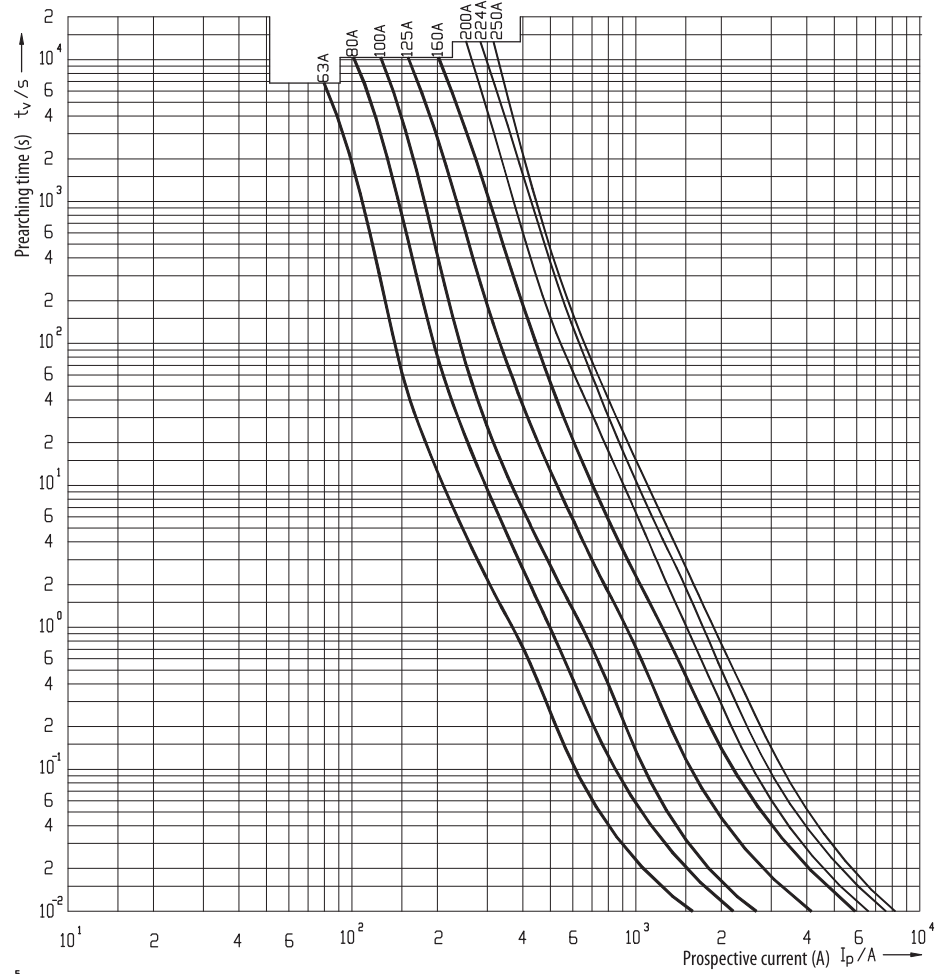


Cut-off current characteristics

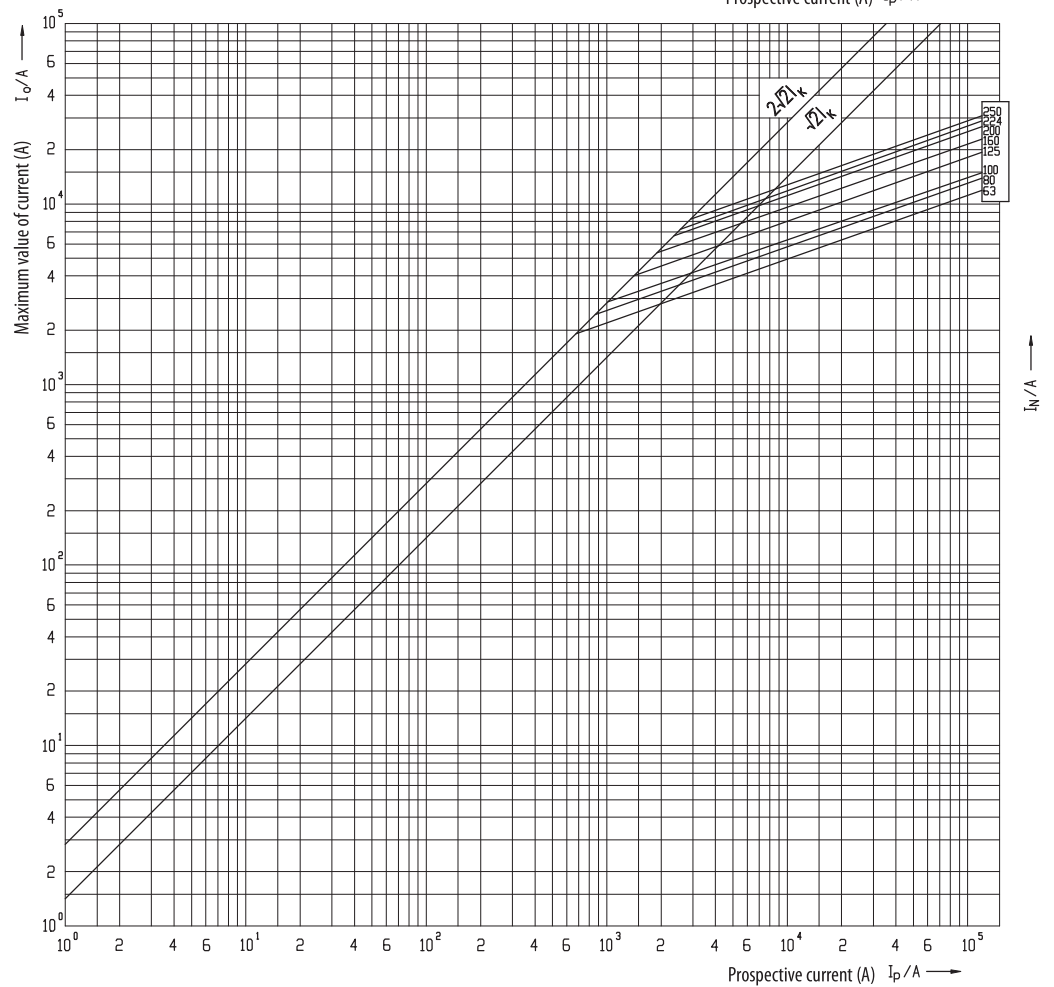


NH2 400V

Time current
characteristics
 $I/t, gG$

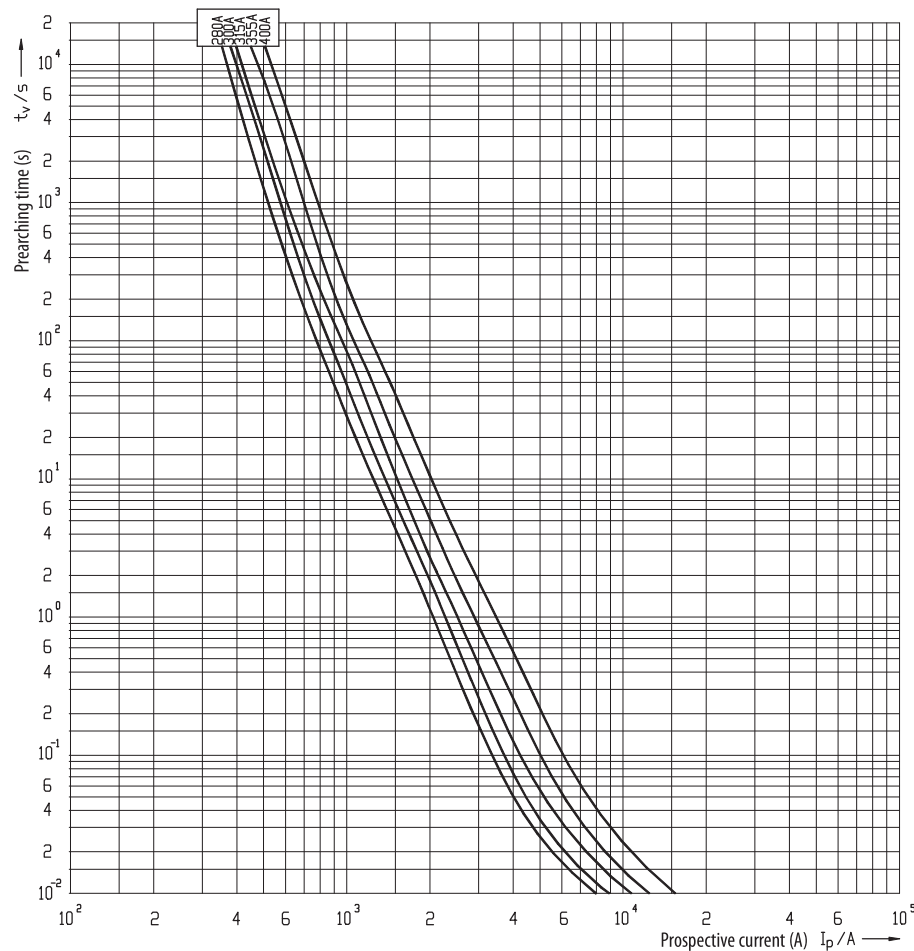


Cut-off current
characteristics

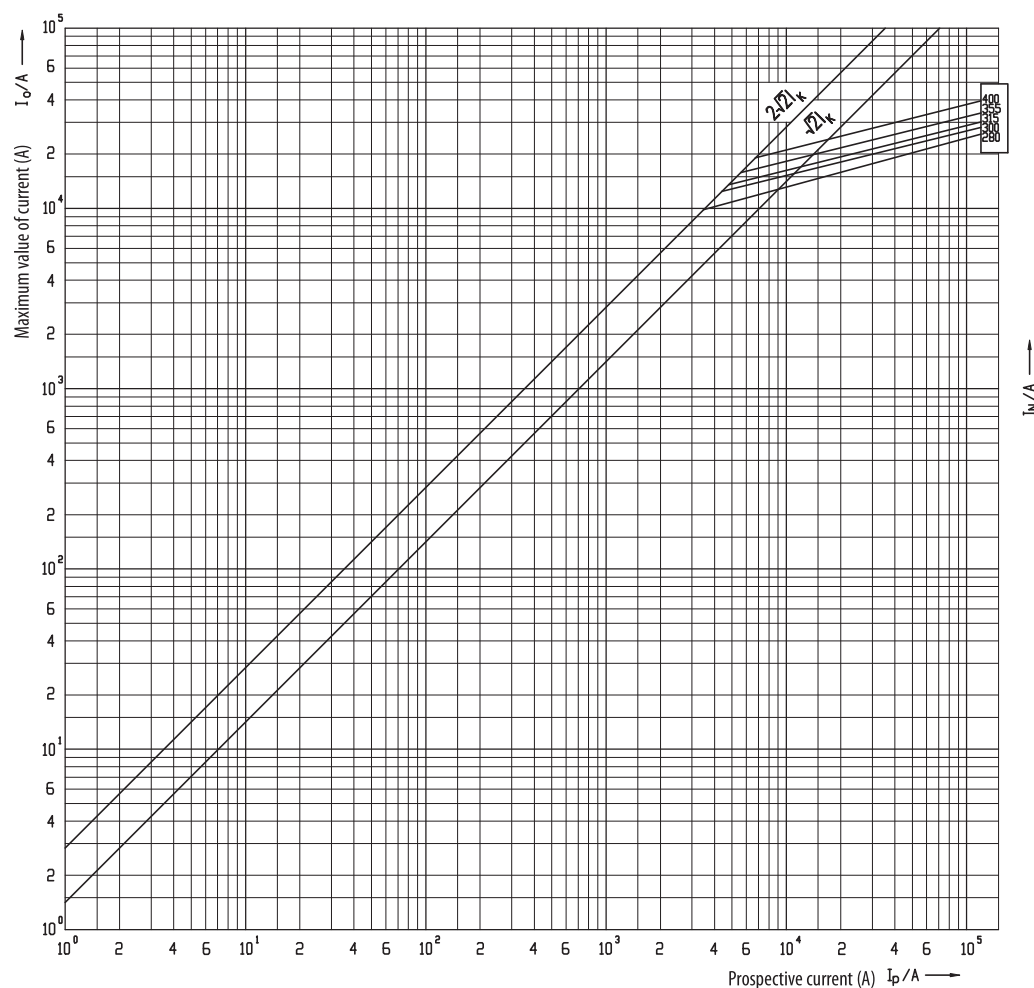


Technical data

NH2 500V

Time current
characteristics
 $I/t, gG$

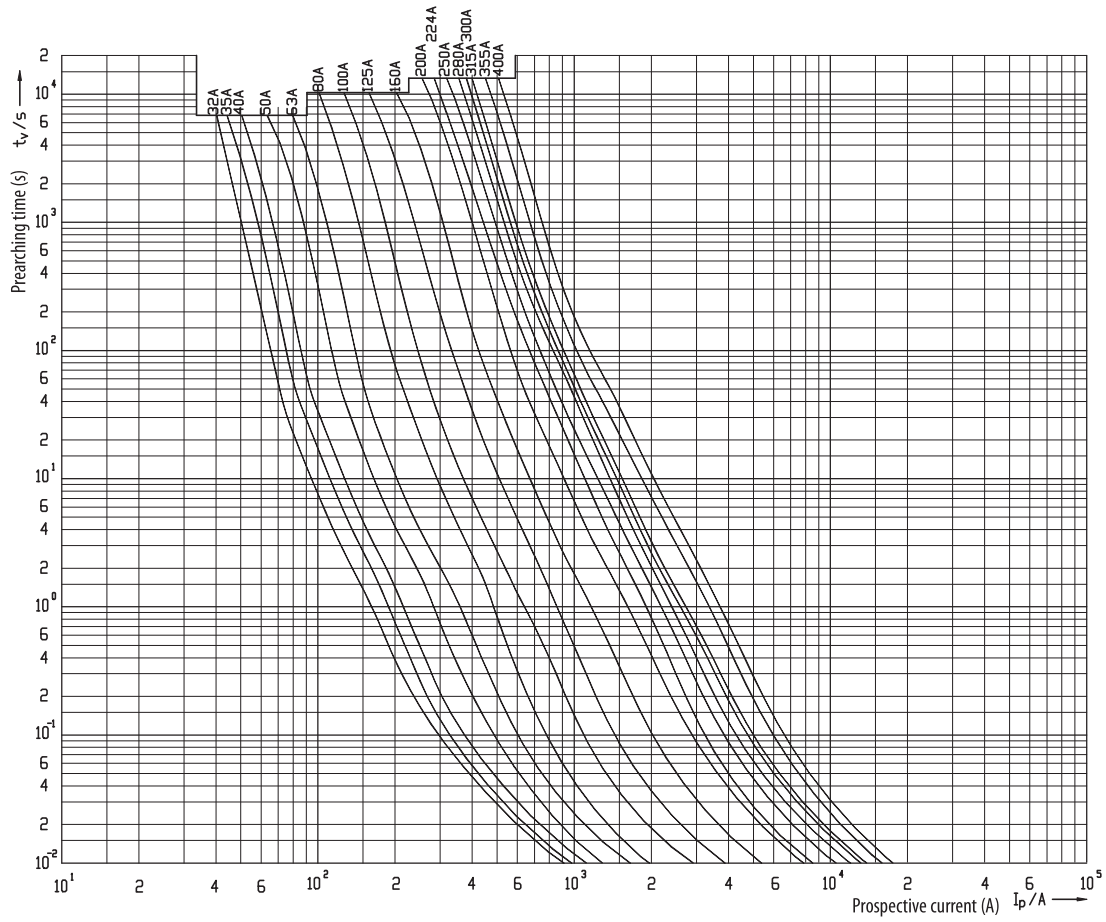


Cut-off current
characteristics

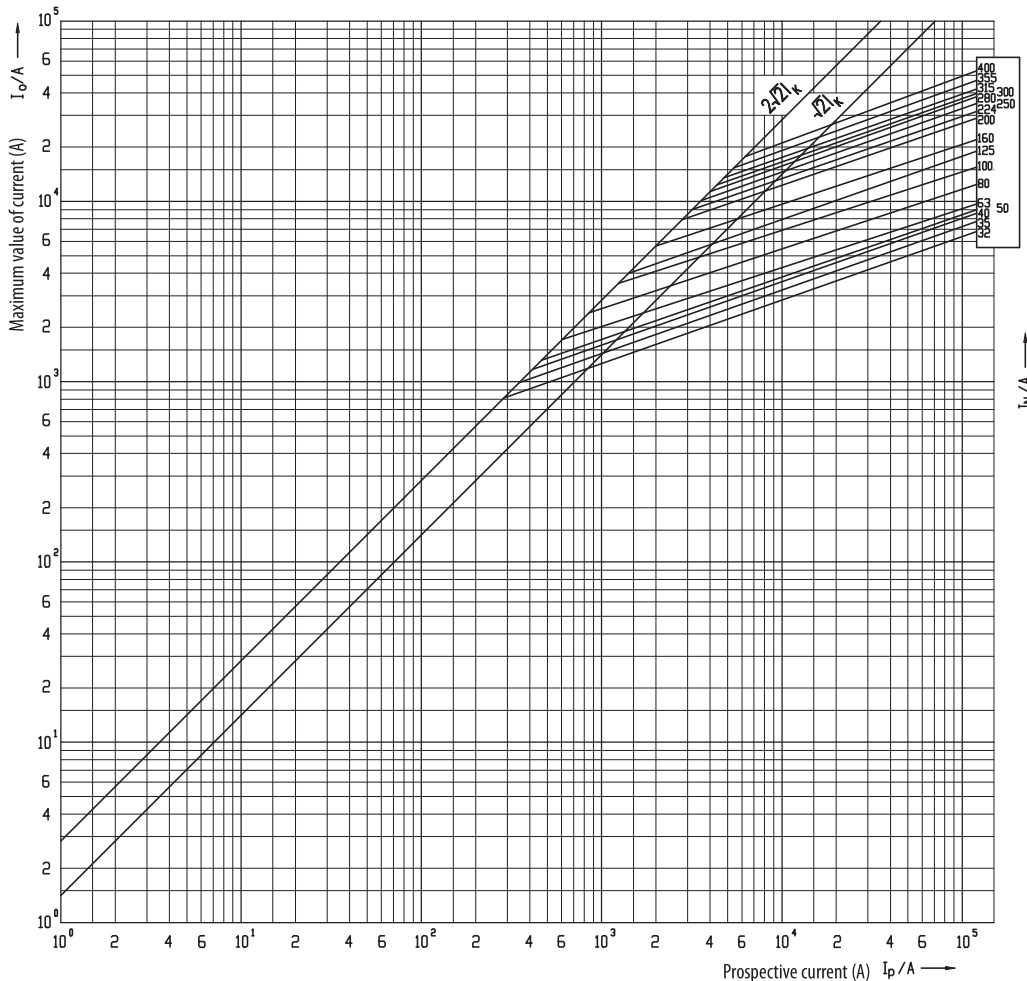


NH2 690V

Time current
characteristics
I/t, gG

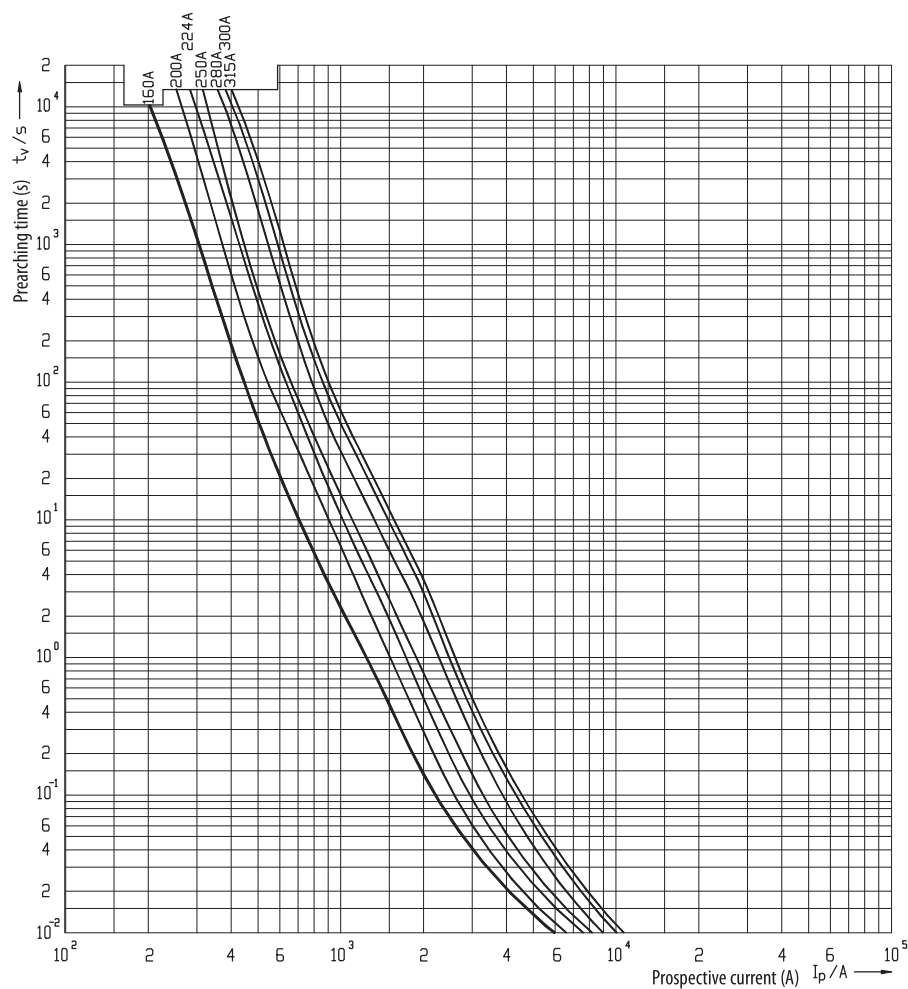


Cut-off current
characteristics

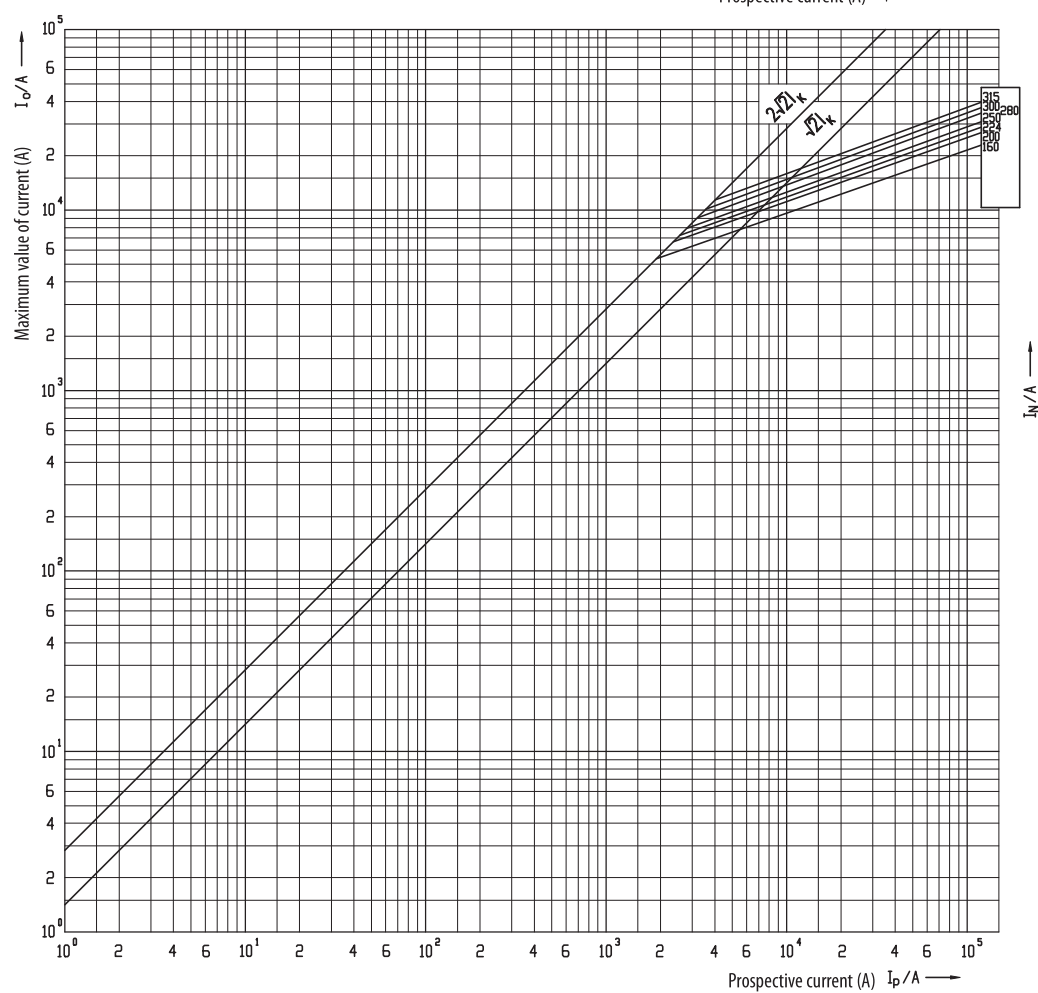


Technical data

NH3C 400V

Time current characteristics
I/t, gG

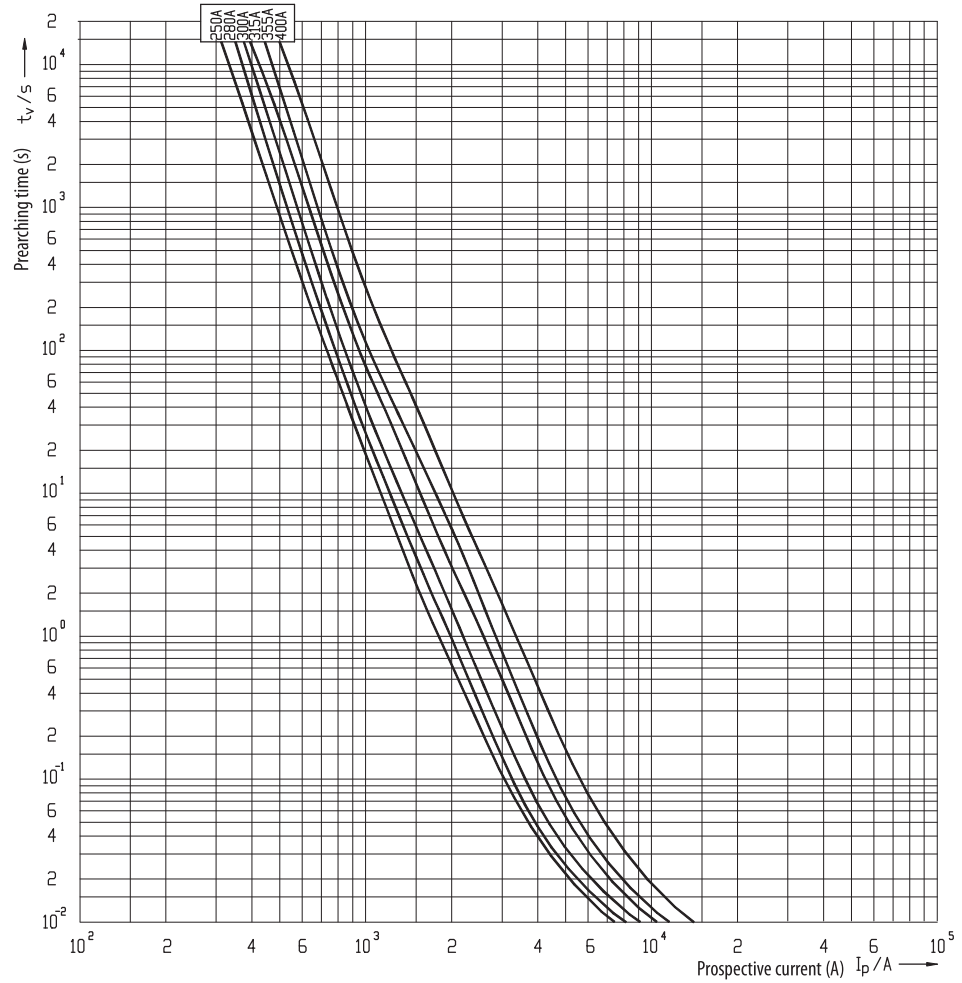


Cut-off current characteristics

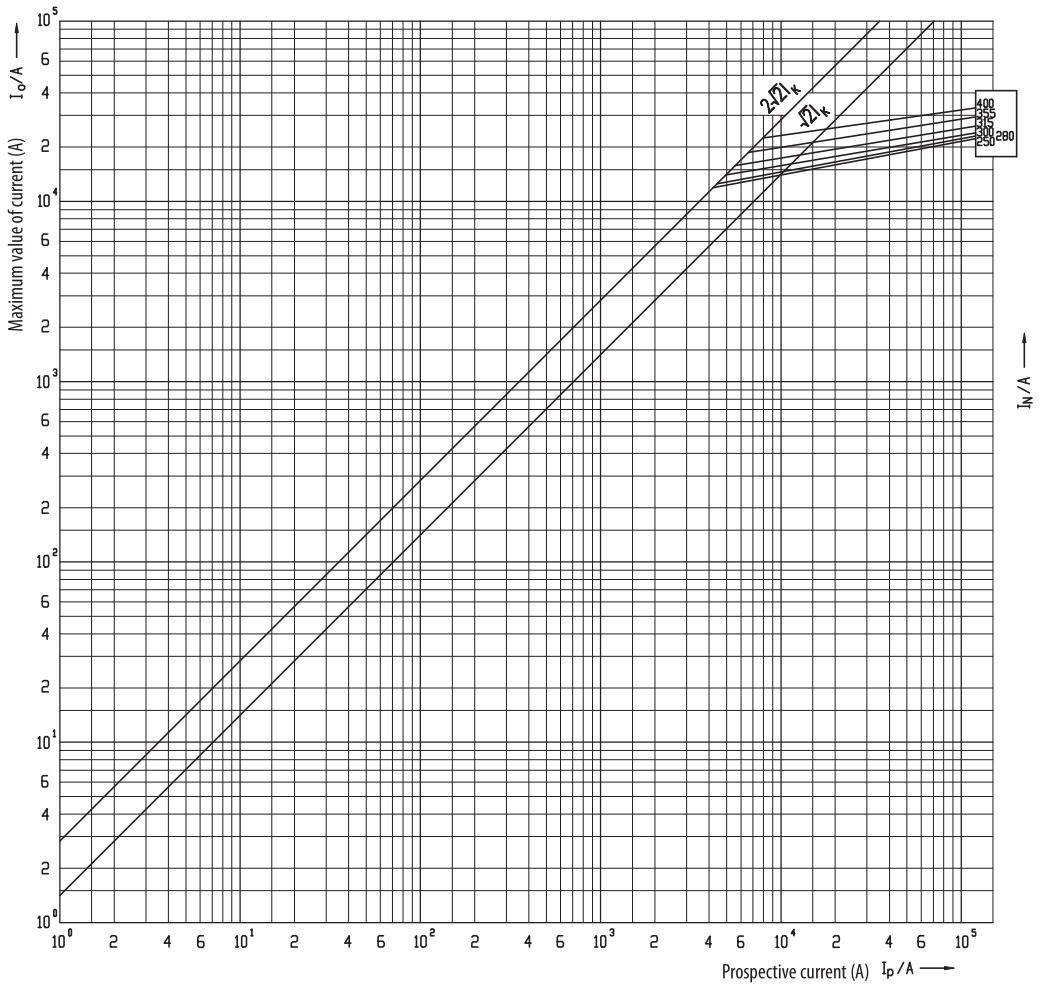


NH3C 500V

Time current
characteristics
 $I/t, gG$

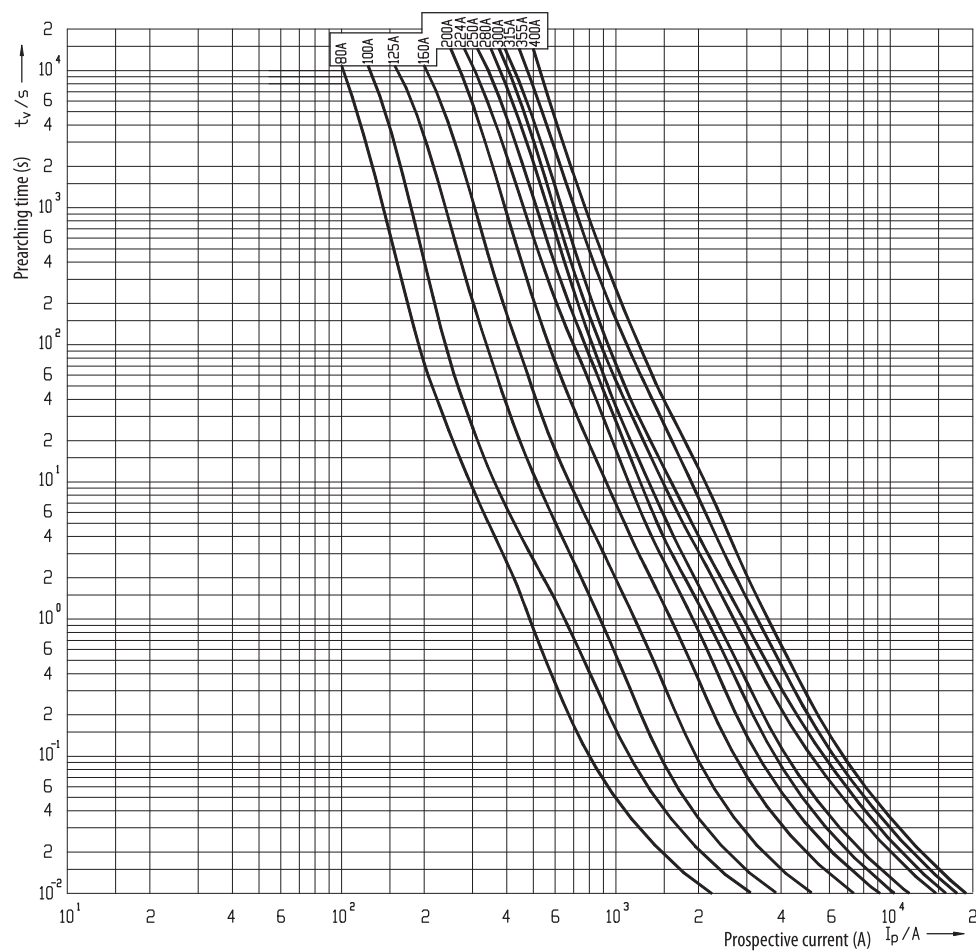


Cut-off current
characteristics

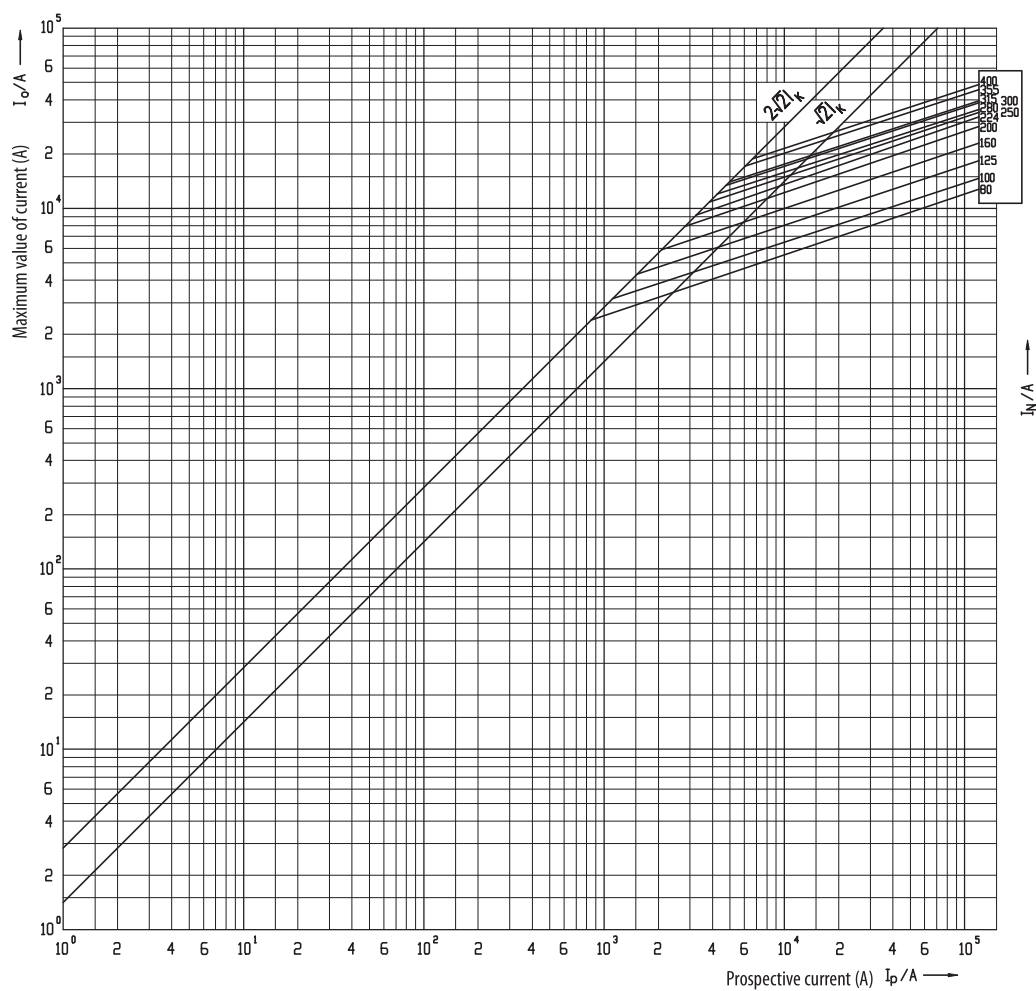

Technical data



NH3C 690V

Time current
characteristics
 $I/t, gG$

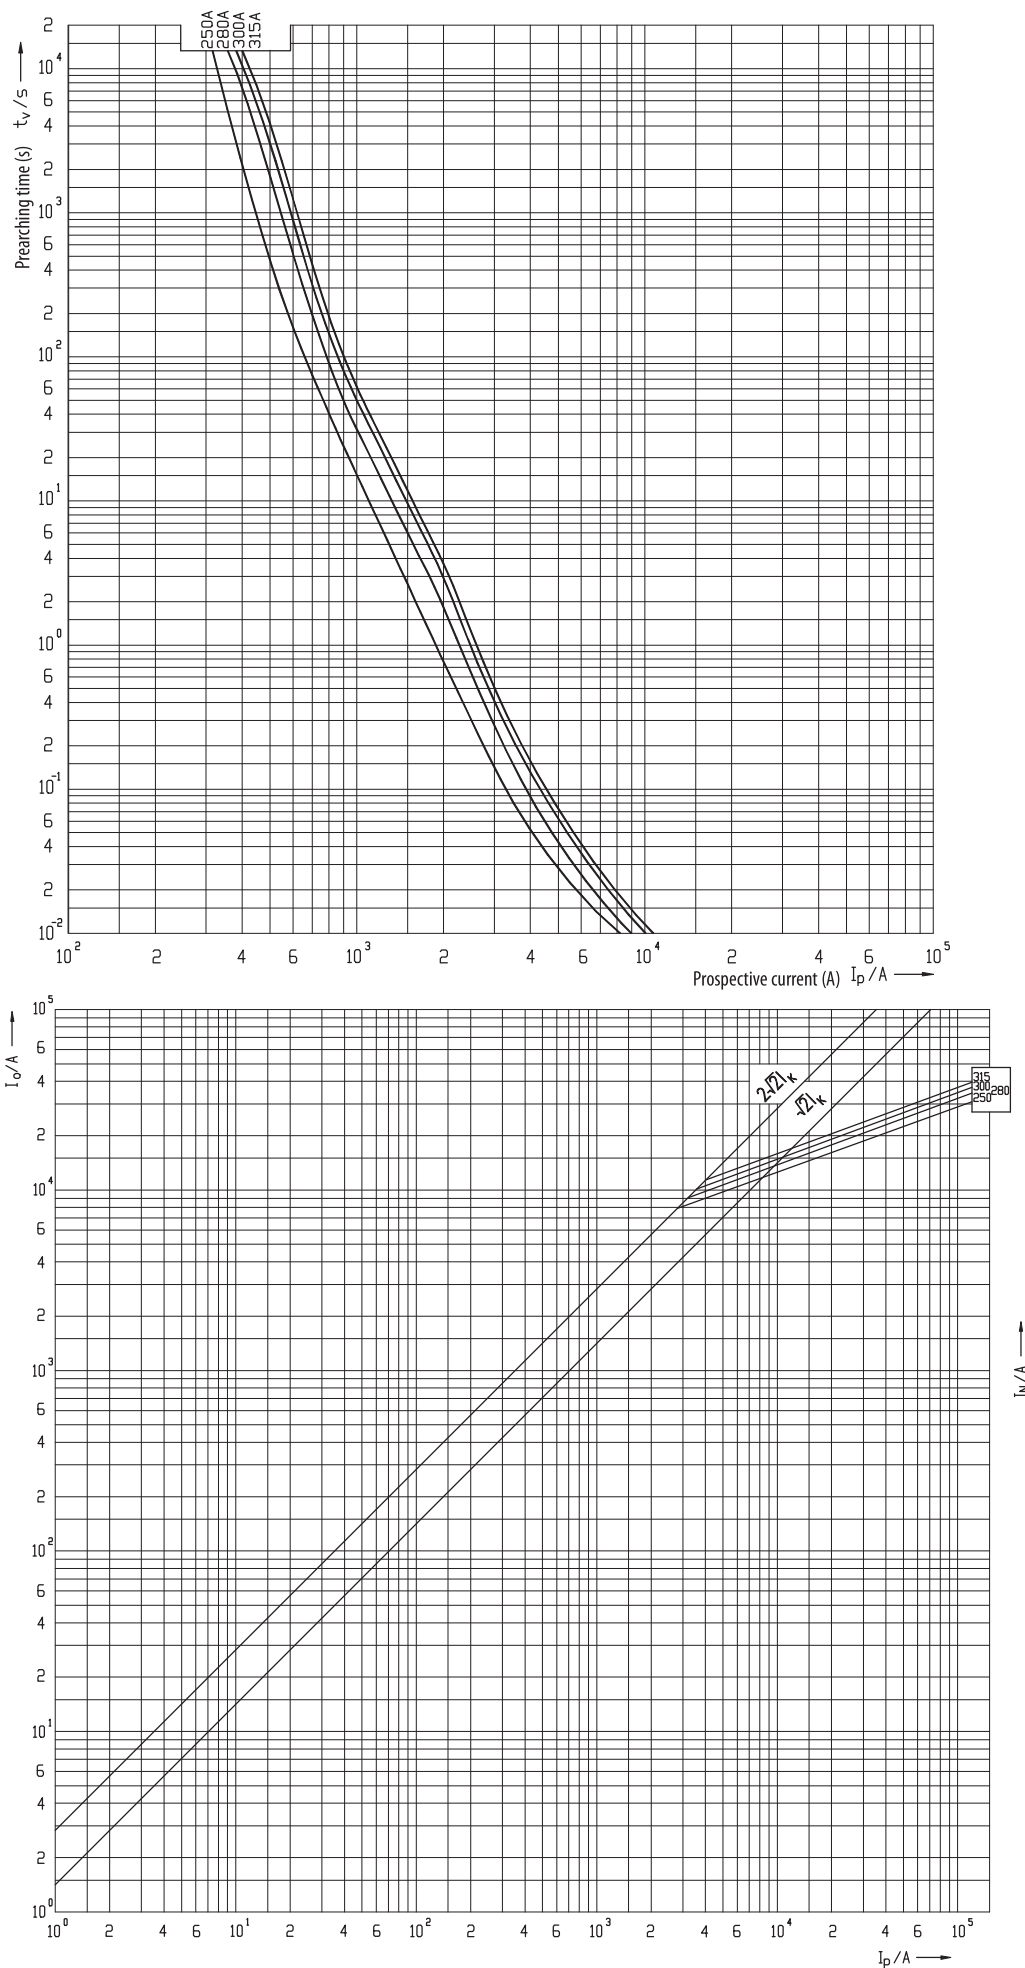


NH3 400V

Time current
characteristics
I/t, gG

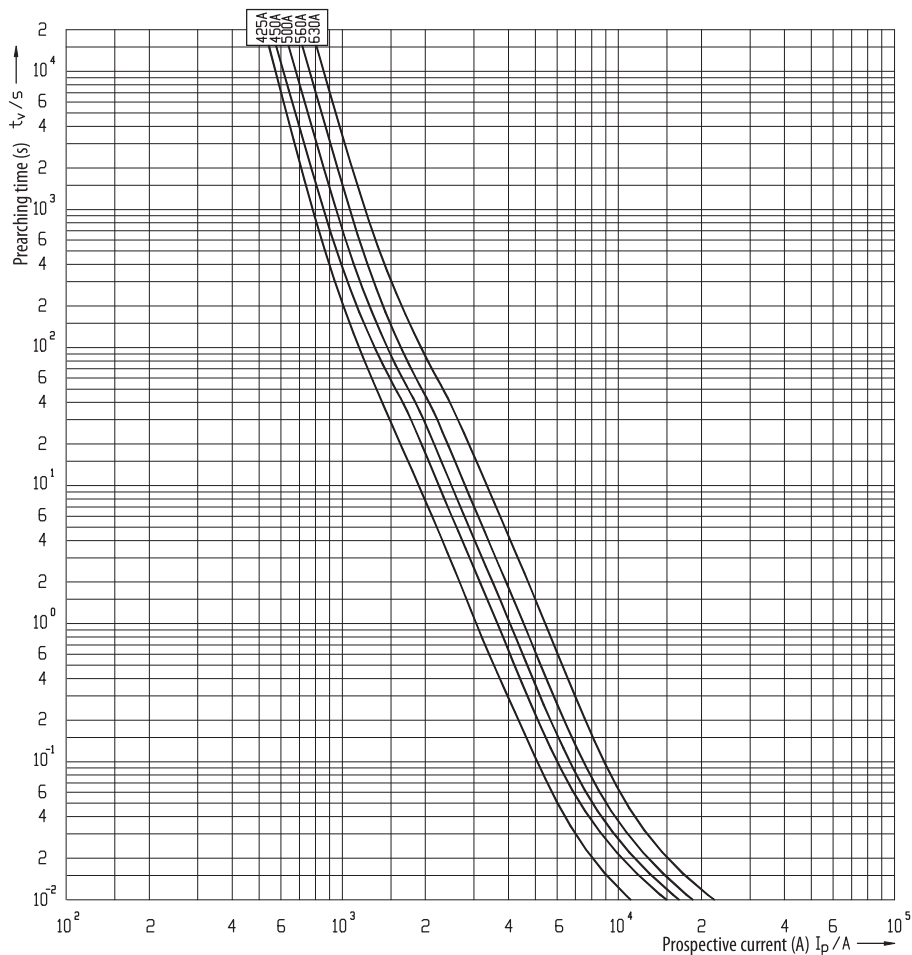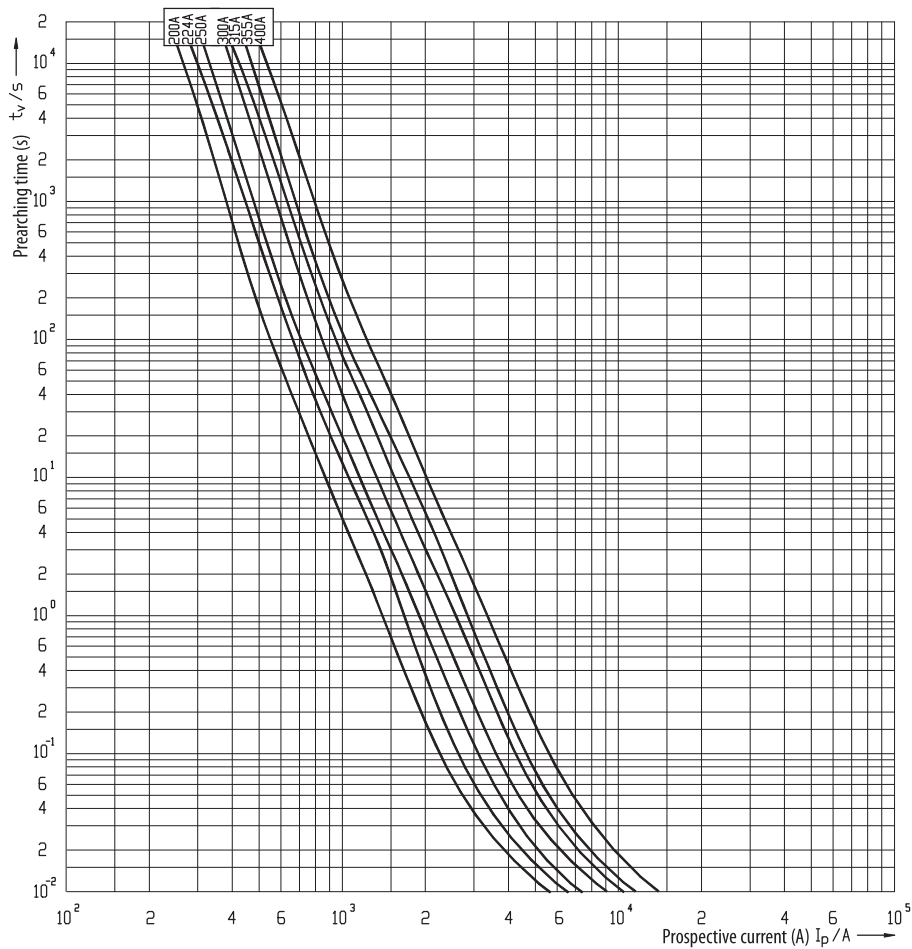



Technical data

Cut-off current characteristics

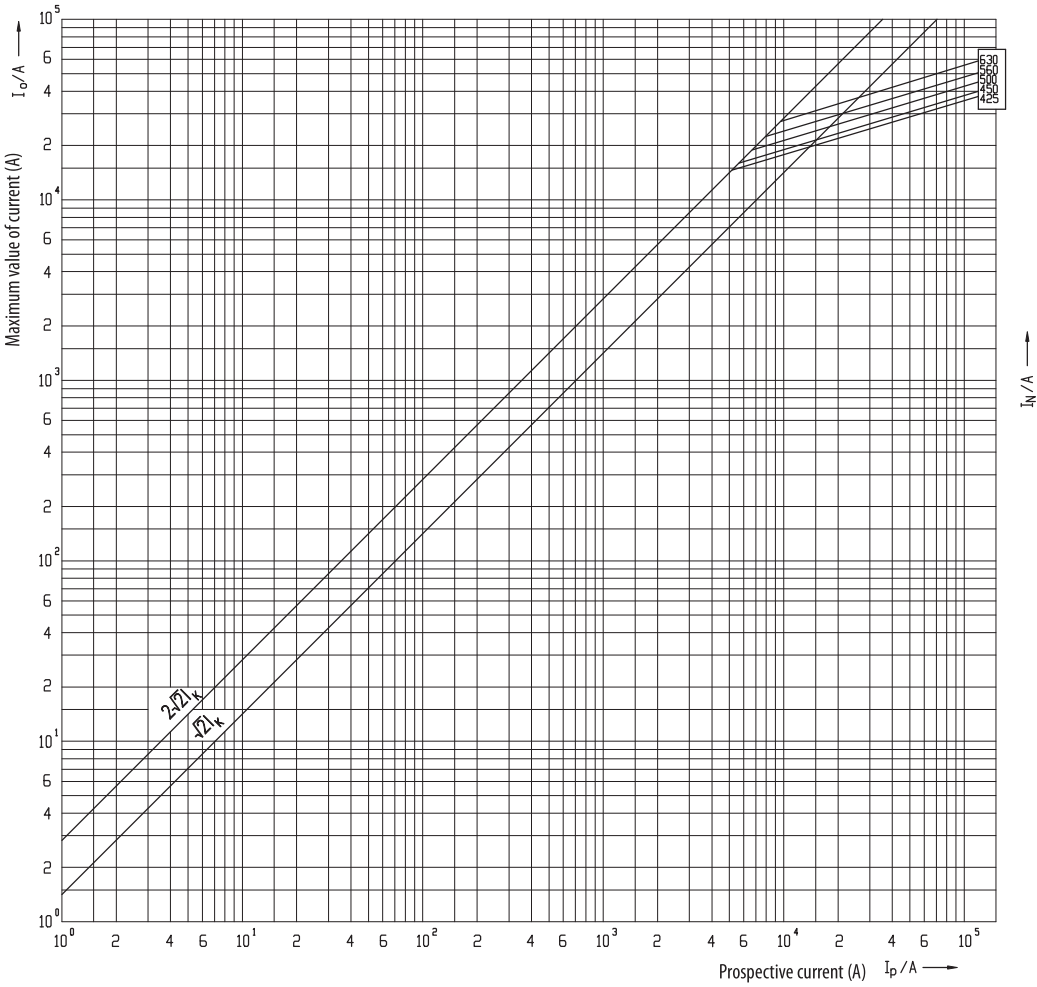


NH3 500V

Time current
characteristics
I/t, gG

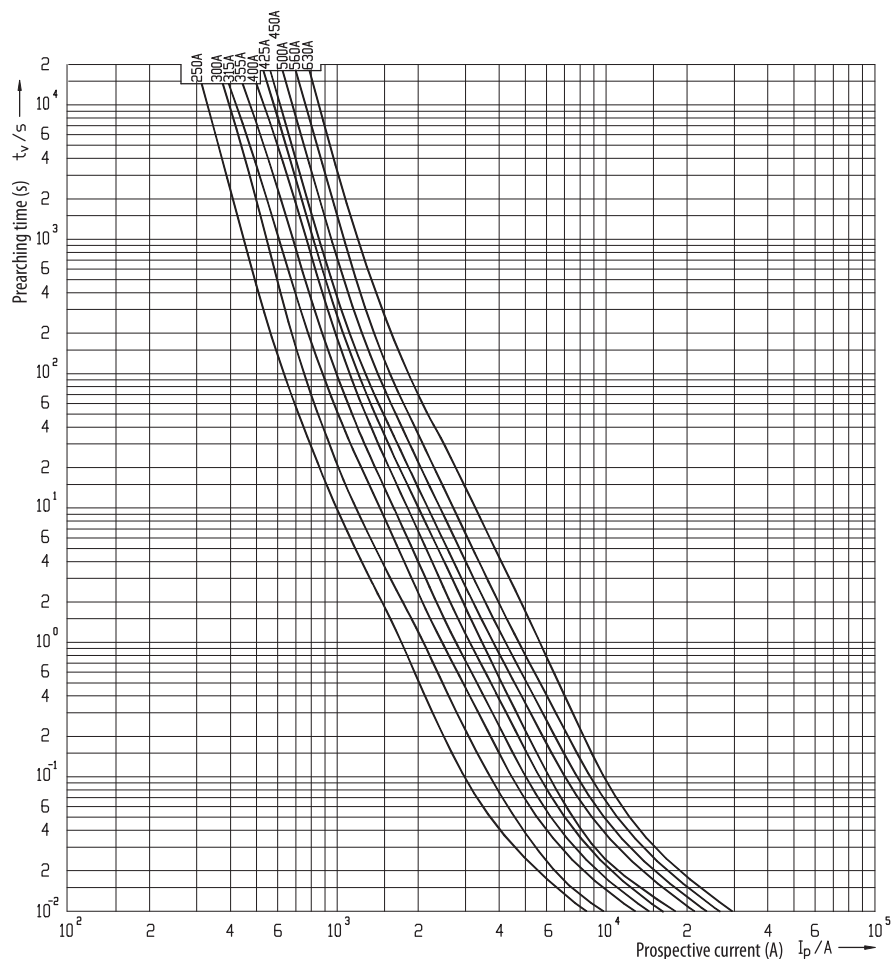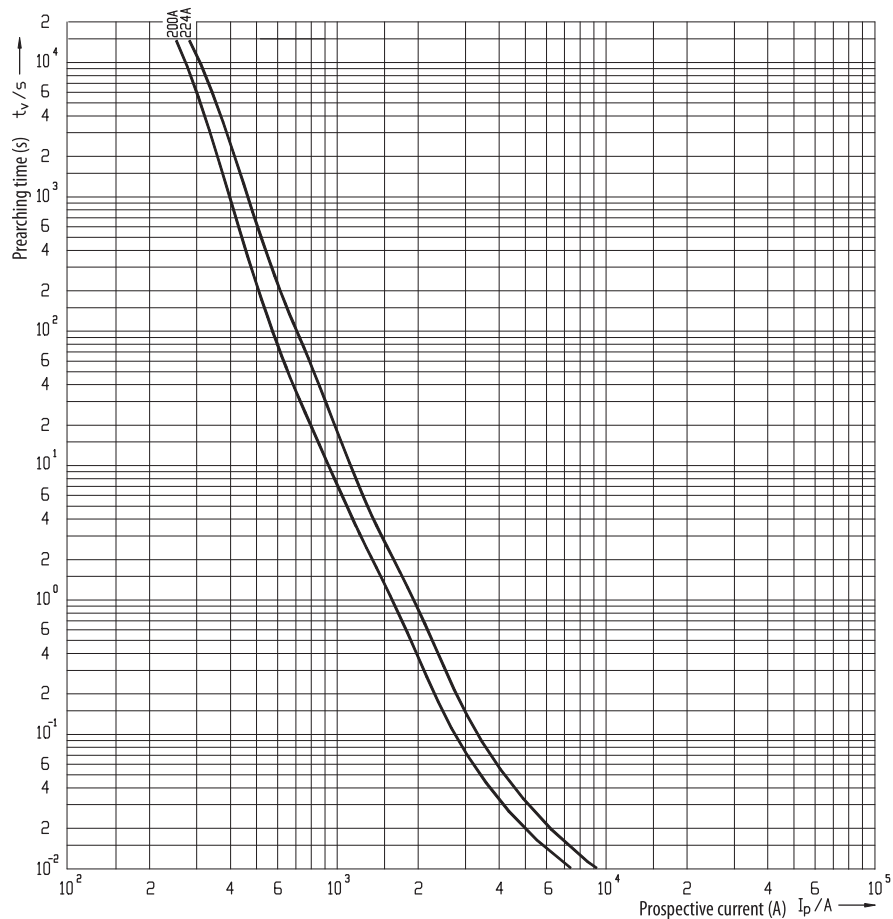


Technical data

Cut-off current characteristics

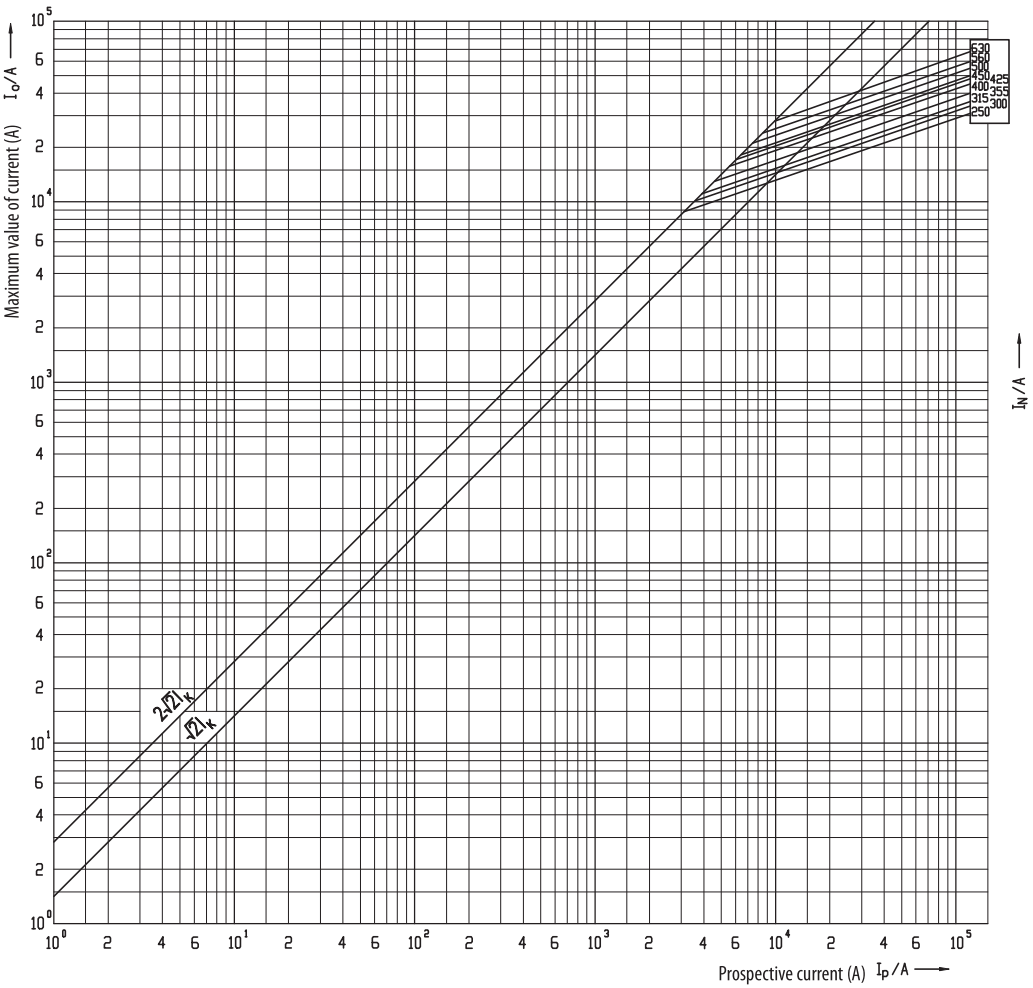


NH3 690V

Time current characteristics
I/t, gG

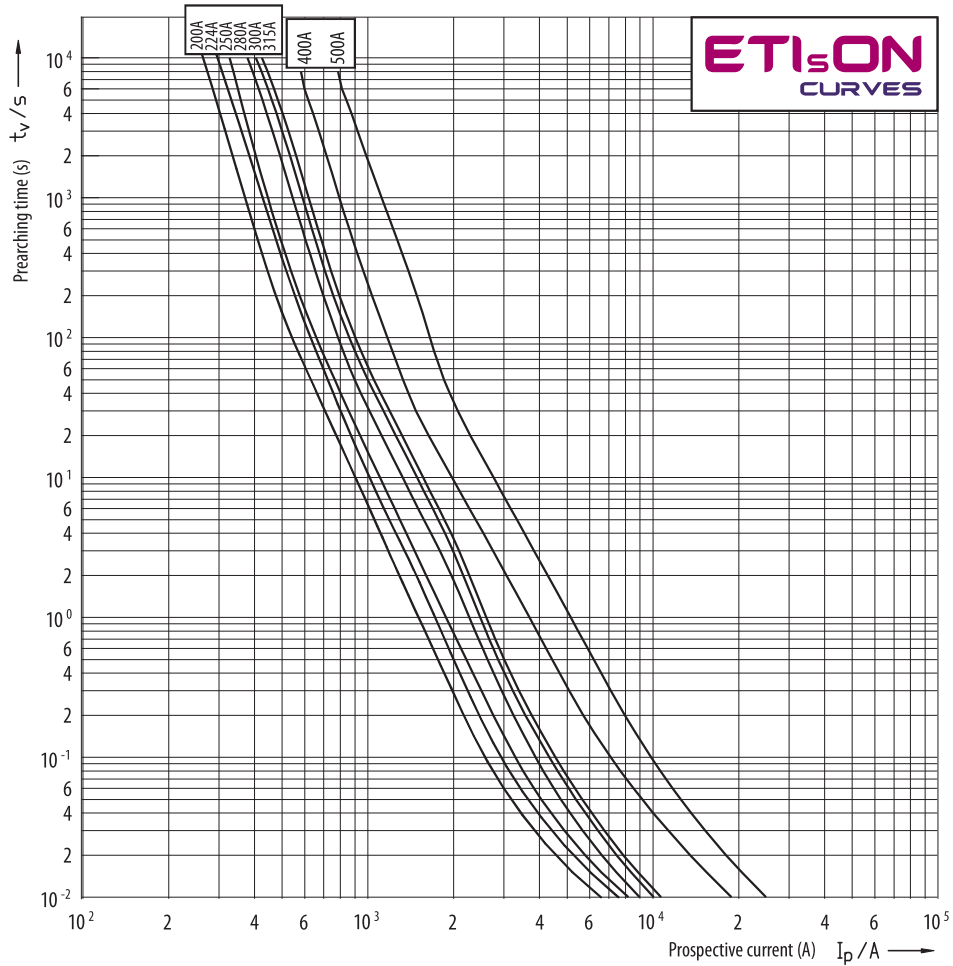


NH4

Time current
characteristics
I/t, gG

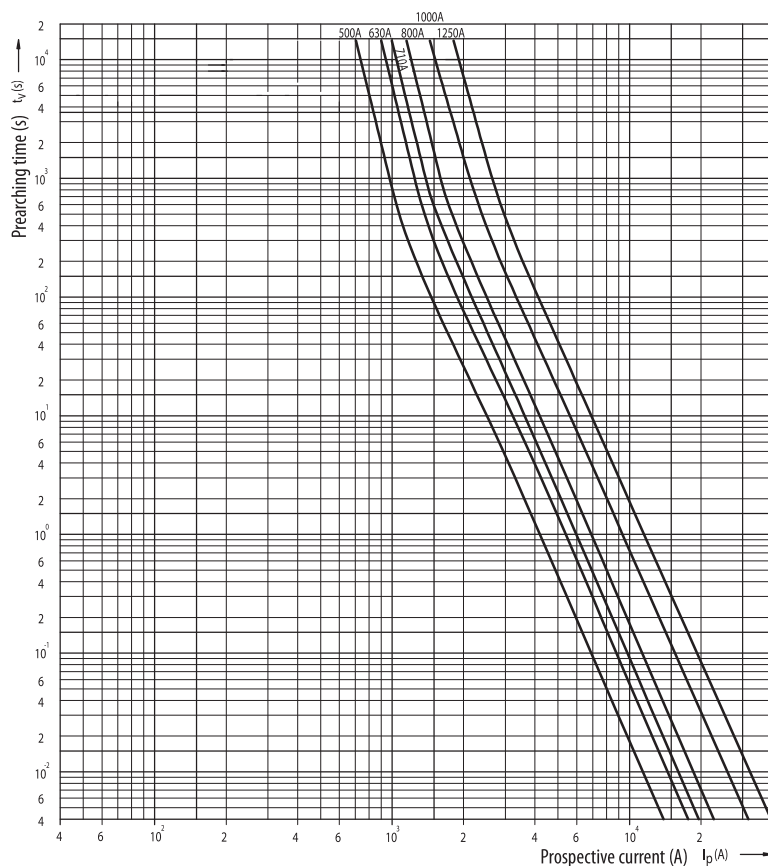

NH4a


Time current
characteristics I/t, gG
(nonstandard rated
currents)

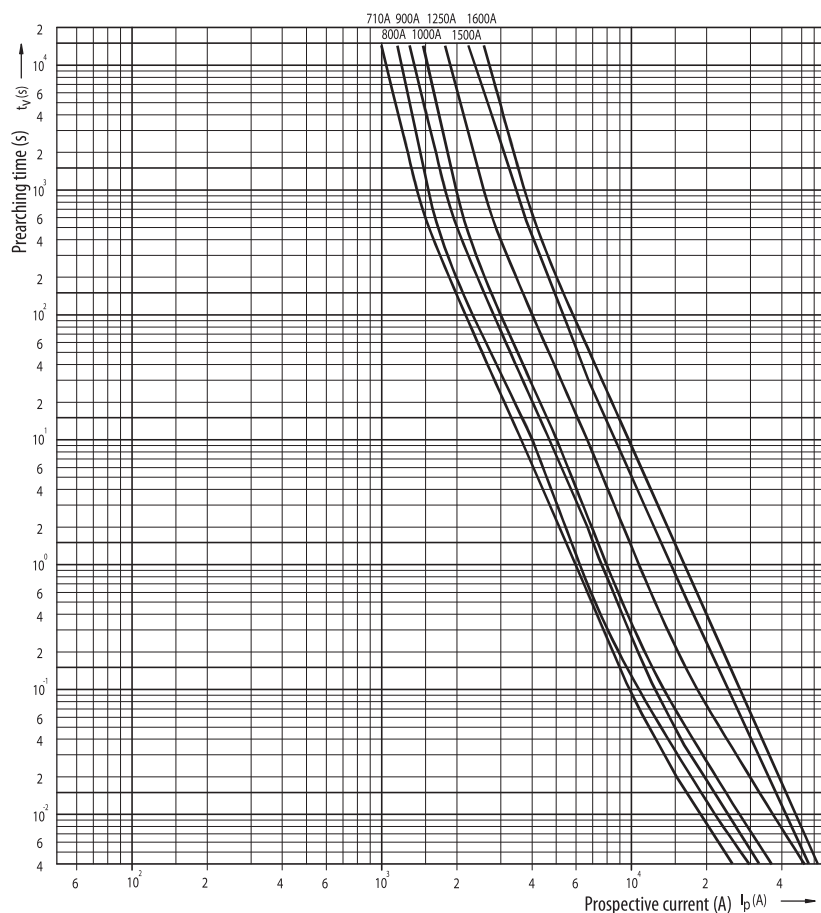

Technical data


NH1 1000V

Time current
characteristics
I/t, gG

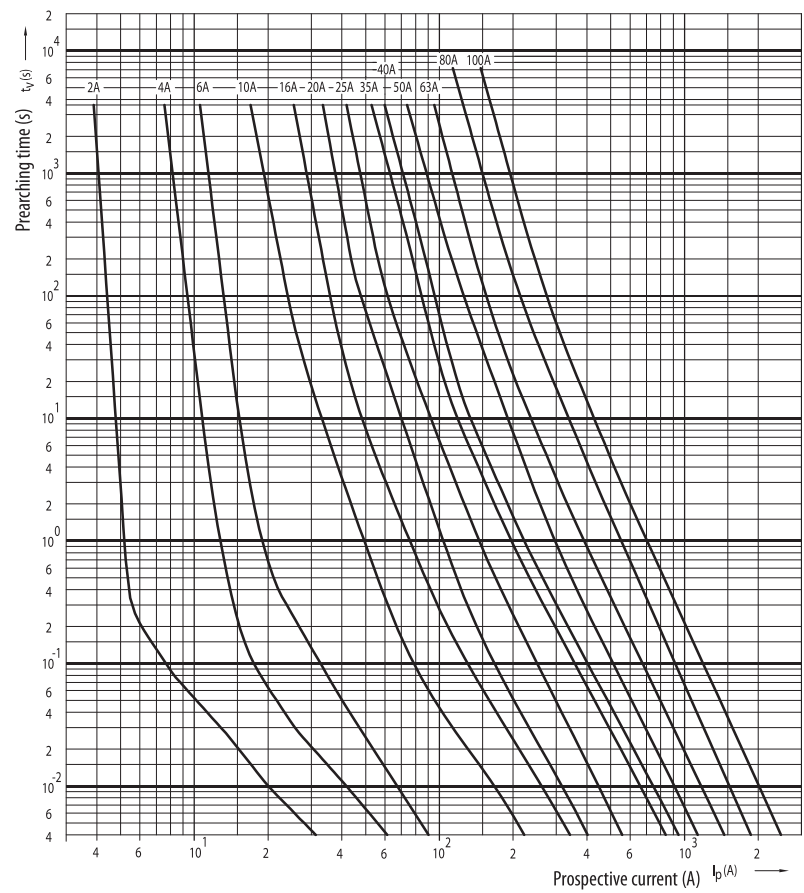

NH4 NH4a NH1 1000V


Cut-off current
characteristics

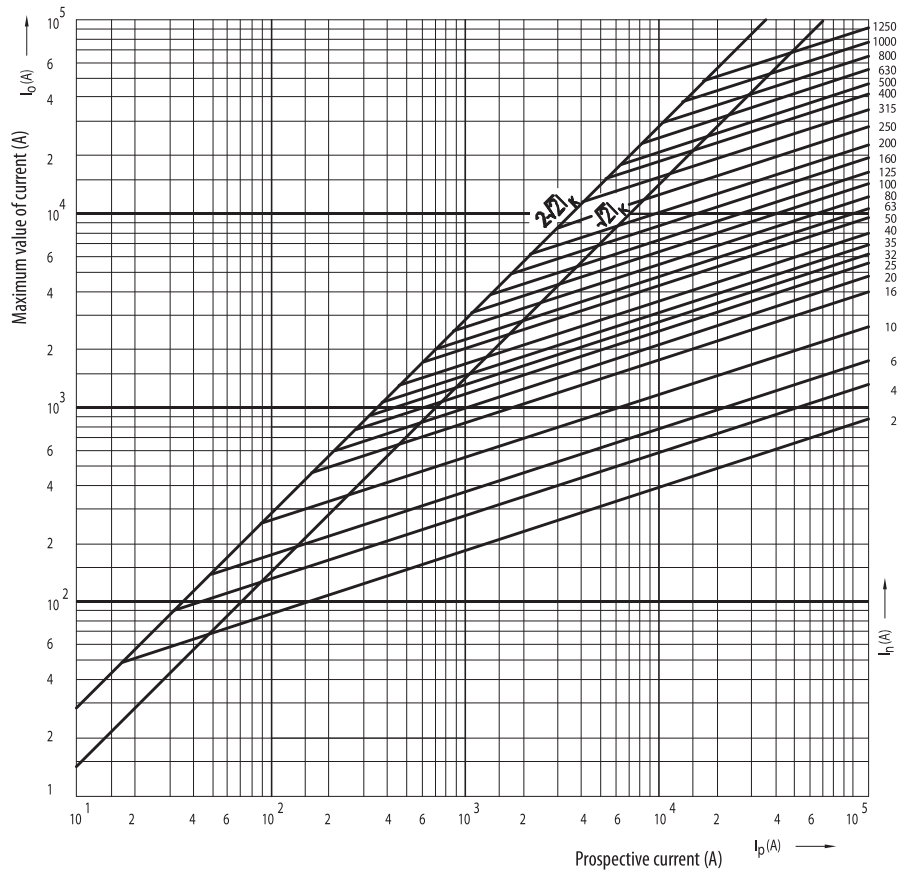

NV fuse-link aM

Time current

characteristics

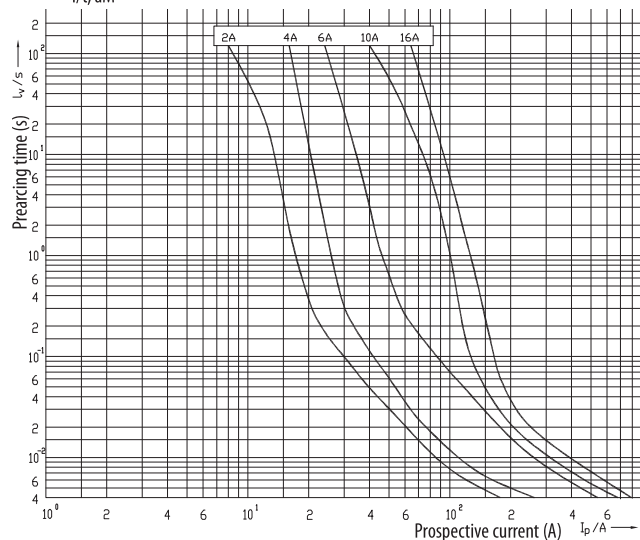
 $I/t, \text{ aM}$ 

Technical data:

Rated voltage U_n	690 V AC
Rated current I_n	2-1250 A
Dimensions	DIN 43620, IEC 60269, EN 60269
Fusing characteristics	aM -> VDE 0636-2011, DIN VDE 0636
Breaking capacity at $1,1 U_n$	100 kA

Power dissipation of fuse-links NV aM 690 V a.c.

size	the highest rated current at according to VDE 0636-2011 690 V AC (A)	the maximal power dissipation 690 V AC (W)	real power dissipation of fuse-links 690 V AC (W)
NV 00	160	12	9
NV 1	250	32	28
NV 2	400	45	41
NV 3	630	60	58
NV 4a	1250	105	110

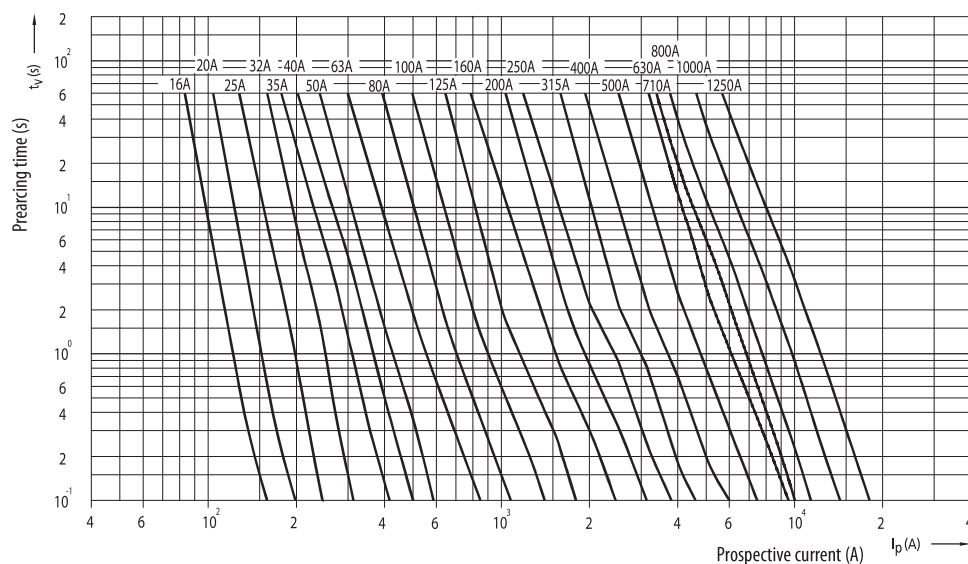Cut-off current
characteristics