


Barrette di espansione 5° polo Boxdin 3 da 160A

Expansion bar 5° pole Boxdin 3 160A

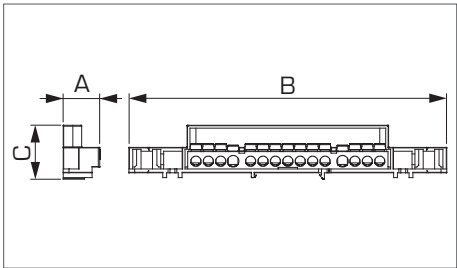

Articolo	Tensione Nominale	Grado di protezione	Ipk	Icc rms	Icw rms1S	Uimp	Caratteristiche polo Bar details		Dimensioni Dimensions			Spazio occupato
							N. Poli Poles N.	N. fori Holes N.	A mm	B mm	C mm	
BAR 11	750 V	IPO0	20	10	6	8	4	$\frac{9 \times \varnothing 5,3 \text{ mm}}{2 \times \varnothing 6 \text{ mm}}$	19	109	25	1
BAR 15	750 V	IPO0	22	11	6	8	4	$\frac{11 \times \varnothing 5,3 \text{ mm}}{2 \times \varnothing 6 \text{ mm}}$	19	174	25	1

Temperatura di esercizio Operating temperature	+85°C
Resistenza al calore Heat resistance	+130°C
Inserto Insert	Ottone Brass
Viti Screws	Acciaio Steel

Supporto isolante Insulating body	Policarbonato e poliammide Polycarbonate and polyamide
Autoestinguenza Self-extinguishing	850°C
Norme Standards	EN 60998-1:2004 EN 60998-2-1:2004