Series ISCHL

- **Socket outlet combination acc. EN 61439**
- Handy, robust, mobile distribution box made of shock-resistant polyamide
- **Dimensions: HxWxD = 200x300x200 mm**
- Maximum rated current of 32A
- Up to 10 sockets (inlet plug + 8 sockets or cable with plug + 9 sockets)
- Up to 13 modules under window
- With carrying-handle made of high-grade steel
- With take-up device for the connecting cable
- Stackable
- Housing color: black
- Ready wired for connection
- **IP44 splashproof**

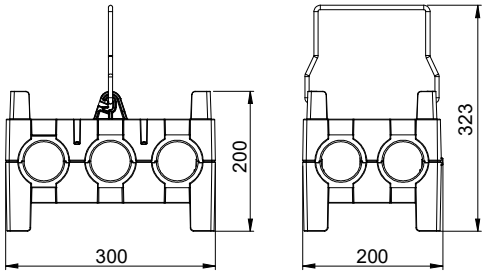

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			2	4	1 x RCD 40A/4/0.03A (TYPE A 25AT)		2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	InA 16A RDF 0,7	**9130074**
			2	4	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with plug 32A 5p 400V	InA 32A RDF 0,8	**9130012**
			2	6	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with plug 32A 5p 400V	InA 32A RDF 0,7	**9130154**
			3	6			2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	VS max.16A	**9130005**
			3	6	1 x RCD 40A/4/0.03A (TYPE A 25AT)		2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	InA 16A RDF 0,6	**9130006**

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor; VS = backup fuse

...available on stock!

Thermoplastic insulated distribution boxes – mobile
Series ISCHL

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	I_{nA} RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
		1	2	3	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with plug 32A 5p 400V	I_{nA} 32A RDF 0,7	**9130080**
		1	2	4	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-C	1 x CEE-flanged plug 32A 5p 400V	I_{nA} 32A RDF 0,7	**9130374**
		1	2	6	1 x RCD 63A/4/0.03A (TYPE A 40AT)	2 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with plug 32A 5p 400V	I_{nA} 32A RDF 0,6	**9130008**
		2	1	6	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with plug 32A 5p 400V	I_{nA} 32A RDF 0,5	**9130007**

I_{nA}= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor; VS = backup fuse

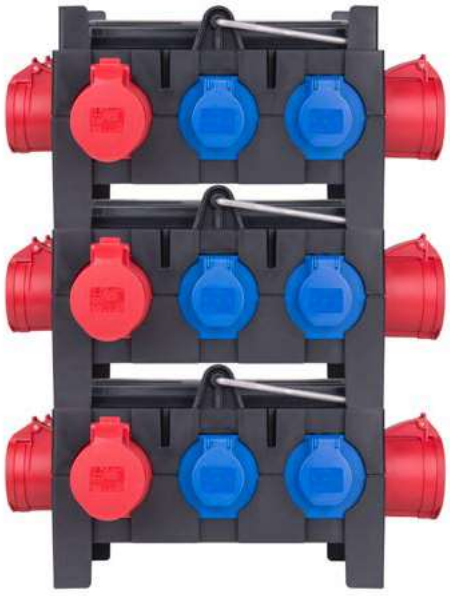

- space-saving storage - boxes are stackable

...available on stock!