

Thermoplastic insulated distribution boxes DELTA[▲] Series LOFER4

Series LOFER4


- **Socket outlet combination**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 255x204x114 mm**
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Ready wired on main connecting terminal for wiring through
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable



9017009

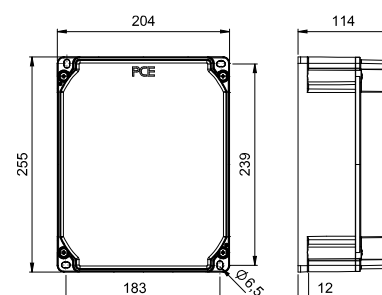

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	VS	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
				6			1xM20 (hole) top 1xM20 (blind cap) bottom	max. 16A	9017037
				8			2xM20 (cable gland ø10-14mm) top	max. 16A	9017009
			4				1xM25 (hole) top 1xM25 (blind cap) bottom	max. 16A	9017101



9017034