


article#	<b>05721-ss</b>
article description	<b>Safety plug 2SL IP54 black series TopTaurus2</b>
description long	Safety plug series TopTaurus2 color: black, material: PA6 2-component rubberized screwless quick lock system for housing cover and strain relief earthing system: dual earthing system 16A/ 250V AC / 3p (2P+E), protection rating: IP54
GTIN (EAN)	9003399490262
country of origin	AT
customs number	85366990
net weight	0.100 kg
packaging quantity	20
minimum order quantity	200

ETIM 9.0	EC000242
Model	Hybrid plug CEE 7/7 (type E/F)
Protective contact	Earthing clips
Material	Plastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Colour	Black
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

K (cable Ø)	6-14 mm
SW	21 mm
wire flexible	0,75-2,5 mm <sup>2</sup>
contact screws	80 Ncm
strain relief	400 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C
IK-code *)	IK10



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

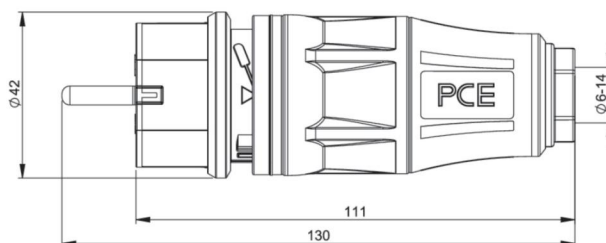

<https://www.pcelectric.at/shop/en/?func=detail&artnr=05721-ss>