


|                        |                                                                                                                                                                                                                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>1932-4v</b>                                                                                                                                                                                                                                                                                                                 |
| article description    | <b>CEE-wall mounted socket 32A 3p 24/42VAC 100-200Hz IP66/IP67 TWIST</b>                                                                                                                                                                                                                                                       |
| description long       | CEE-wall mounted socket 32A 3p 24/42VAC 100-200Hz IP66/IP67 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (3P)<br>clock-position: 4h<br>rated voltage/frequency: 24/42V~ / 100-200Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399347986                                                                                                                                                                                                                                                                                                                  |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                             |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                       |
| net weight             | 0.244 kg                                                                                                                                                                                                                                                                                                                       |
| packaging quantity     | 5                                                                                                                                                                                                                                                                                                                              |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                             |

|                                 |                                      |
|---------------------------------|--------------------------------------|
| ETIM 9.0                        | EC001321                             |
| IEC-amperage                    | 32 A                                 |
| Number of poles                 | 3                                    |
| Voltage according to EN 60309-2 | 20-25 V / 40-50 V (100-200 Hz) green |
| Clock hour position             | 4 h                                  |
| Identification colour           | Green                                |
| Degree of protection (IP)       | IP67                                 |
| Connection system               | Screwed terminal                     |
| Cable entry                     | Gland nut                            |
| Material                        | Plastic                              |
| Contact material                | CuZn                                 |
| Surface treatment contacts      | Nickel-plated                        |
| Type of fastening               | External mounting                    |
| Insulated mounting              | True                                 |

|                        |                        |
|------------------------|------------------------|
| a                      | 143 mm                 |
| b                      | 95 mm                  |
| wire flexible          | 1-10 mm <sup>2</sup>   |
| wire solid             | 1,5-10 mm <sup>2</sup> |
| contact screws         | 160 Ncm                |
| connecting screws      | 110 Ncm                |
| dismantling length     | 70 mm                  |
| stripping length       | 14-16 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

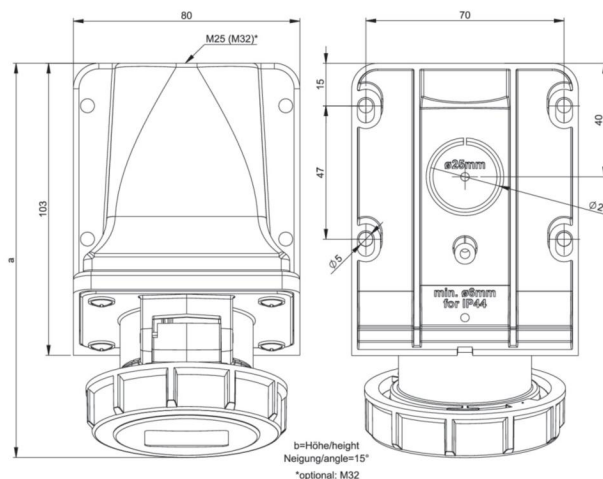

<https://www.pcelectric.at/shop/en/?func=detail&artnr=1932-4v>