


article#	253622-sxs
article description	3-way connector solid rubber IP44
description long	3-way connector solid rubber with hinged lid color housing: black/black contact carrier: TPE ready wired on 3-pole terminal block (PH1) earthing system: Austrian/German contacts: nickel plated 250V~ / 16A / 2P+E external strain relief for severe conditions protection rating: IP44
GTIN (EAN)	9003399322891
country of origin	AT
customs number	85366990
net weight	0.383 kg
packaging quantity	5
minimum order quantity	5

ETIM 9.0	EC001327
Model	Coupler CEE 7/3 (Typ F)
Material	Full rubber
For heavy conditions according to VDE	True
Degree of protection (IP)	IP44
Insert direction	Straight
Connection system	Screwed terminal
Colour	Black
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A

K (cable Ø)	6-19 mm
SW	38 mm
wire flexible	1-2,5 mm ²
contact screws	80 Ncm
strain relief	80 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C

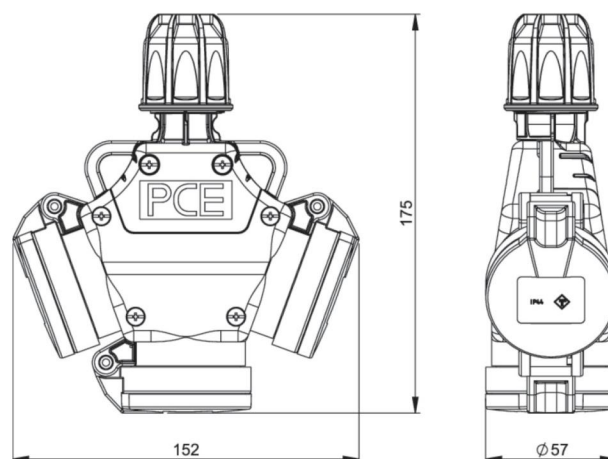

<https://www.pcelectric.at/shop/en/?func=detail&artnr=253622-sxs>

