


|                        |                                                                                                                                                                                                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>25732-sr</b>                                                                                                                                                                                                                                                                                   |
| article description    | <b>Safety connector lid nat LED IP54 red series TopTaurus2</b>                                                                                                                                                                                                                                    |
| description long       | Safety connector series TopTaurus2 with hinged lid<br>color: black-red, material: PA6 2-component rubberized<br>screwless quick lock system for housing cover and strain relief<br>LED voltage indicator<br>earthing system: Austrian/German<br>16A/ 250V AC / 3p (2P+E), protection rating: IP54 |
| GTIN (EAN)             | 9003399487224                                                                                                                                                                                                                                                                                     |
| country of origin      | AT                                                                                                                                                                                                                                                                                                |
| customs number         | 85366990                                                                                                                                                                                                                                                                                          |
| net weight             | 0.134 kg                                                                                                                                                                                                                                                                                          |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                |

|                                       |                         |
|---------------------------------------|-------------------------|
| ETIM 9.0                              | EC001327                |
| Model                                 | Coupler CEE 7/3 (Typ F) |
| Material                              | Plastic                 |
| For heavy conditions according to VDE | True                    |
| Degree of protection (IP)             | IP54                    |
| Insert direction                      | Straight                |
| Connection system                     | Screwed terminal        |
| Colour                                | Red                     |
| Number of poles                       | 3                       |
| Nominal voltage                       | 250 V                   |
| Nominal current                       | 16 A                    |

|                     |                       |
|---------------------|-----------------------|
| K (cable Ø)         | 6-14 mm               |
| SW                  | 21 mm                 |
| wire flexible       | 1-2,5 mm <sup>2</sup> |
| contact screws      | 80 Ncm                |
| strain relief       | 400 Ncm               |
| dismantling length  | 30 mm                 |
| stripping length    | 7 mm                  |
| ambient temperature | -25 – 40 °C           |
| IK-code *)          | IK09                  |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

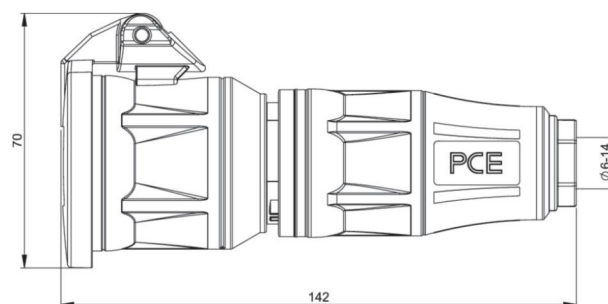

<https://www.pcelectric.at/shop/en/?func=detail&artnr=25732-sr>