


|                        |                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>3832-11f9v</b>                                                                                                                                                                                                                                                                                                                                                                                       |
| article description    | <b>CEE-flanged socket straight 54x60mm 16A 3p 24/42VAC &gt;400-500Hz IP66/IP67 TWIST</b>                                                                                                                                                                                                                                                                                                                |
| description long       | CEE-flanged socket straight 54x60mm 16A 3p 24/42VAC >400-500Hz IP66/IP67 TWIST<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (3P)<br>clock-position: 11h<br>rated voltage/frequency: 24/42V~ / >400-500Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 54x60 mm / 44x44 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399328794                                                                                                                                                                                                                                                                                                                                                                                           |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                      |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                |
| net weight             | 0.156 kg                                                                                                                                                                                                                                                                                                                                                                                                |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                                                      |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                                                      |

|                                 |                                       |
|---------------------------------|---------------------------------------|
| ETIM 9.0                        | EC001317                              |
| IEC-ampereage                   | 16 A                                  |
| Voltage according to EN 60309-2 | 20-25 V / 40-50 V (>400-500 Hz) green |
| Number of poles                 | 3                                     |
| Clock hour position             | 11 h                                  |
| Identification colour           | Green                                 |
| Degree of protection (IP)       | IP67                                  |
| Connection system               | Screwed terminal                      |
| Angle of plug                   | Straight                              |
| Material                        | Plastic                               |
| Contact material                | CuZn                                  |
| Surface treatment contacts      | Nickel-plated                         |
| Flange size vertical            | 60 mm                                 |
| Drill hole distance vertical    | 44 mm                                 |
| Flange size horizontal          | 54 mm                                 |
| Drill hole distance horizontal  | 44 mm                                 |

|                        |                        |
|------------------------|------------------------|
| a                      | 54 mm                  |
| b                      | 60 mm                  |
| c                      | 44 mm                  |
| d                      | 44 mm                  |
| e                      | 19 mm                  |
| f                      | 48 mm                  |
| g                      | 5,5 mm                 |
| h                      | 43 mm                  |
| i                      | 100 mm                 |
| j                      | 93 mm                  |
| wire flexible          | 1-10 mm <sup>2</sup>   |
| wire solid             | 1,5-10 mm <sup>2</sup> |
| contact screws         | 160 Ncm                |
| dismantling length     | 70 mm                  |
| stripping length       | 14-16 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

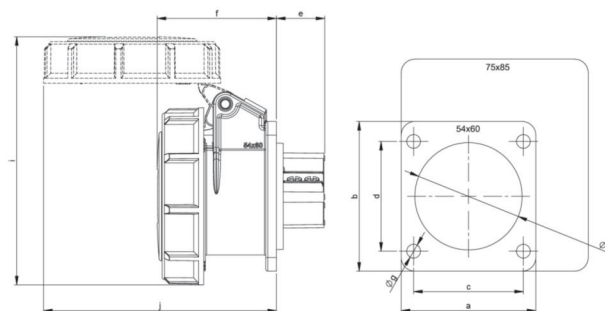

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3832-11f9v>