


|                        |                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>692-3v</b>                                                                                                                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-flanged plug straight 70x70mm 32A 2p 24/42VAC 400Hz IP44 TWIST</b>                                                                                                                                                                                                                                                                                                        |
| description long       | CEE-flanged plug straight 70x70mm 32A 2p 24/42VAC 400Hz IP44 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 2 (2P)<br>clock-position: 3h<br>rated voltage/frequency: 24/42V~ / 400Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 70x70 mm / 56x56 mm<br>IP protection class: IP44 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                               |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                         |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                               |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                               |

|                                 |                                  |
|---------------------------------|----------------------------------|
| ETIM 9.0                        | EC001319                         |
| IEC-amperage                    | 32 A                             |
| Voltage according to EN 60309-2 | 20-25 V / 40-50 V (400 Hz) green |
| Number of poles                 | 2                                |
| Clock hour position             | 3 h                              |
| Identification colour           | Green                            |
| Degree of protection (IP)       | IP44                             |
| Connection system               | Screwed terminal                 |
| Construction type               | Built-up device plug             |
| Angle of plug                   | Straight                         |
| Material                        | Plastic                          |
| Contact material                | CuZn                             |
| Surface treatment contacts      | Nickel-plated                    |

|                        |                      |
|------------------------|----------------------|
| a                      | 70 mm                |
| b                      | 70 mm                |
| c                      | 56 mm                |
| d                      | 56 mm                |
| e                      | 19 mm                |
| f                      | 28 mm                |
| g                      | 5 mm                 |
| h                      | 43 mm                |
| wire flexible          | 4-10 mm <sup>2</sup> |
| wire solid             | 4-10 mm <sup>2</sup> |
| contact screws         | 110 Ncm              |
| dismantling length     | 70 mm                |
| stripping length       | 14-16 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

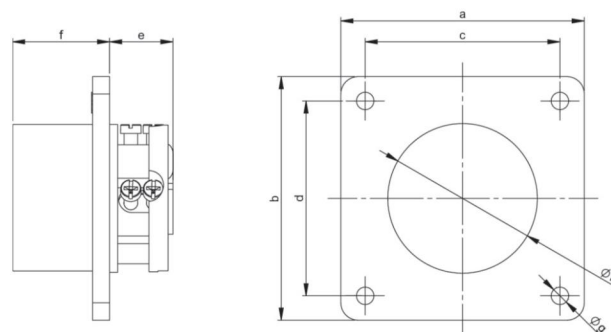

<https://www.pcelectric.at/shop/en/?func=detail&artnr=692-3v>