


Solid-rubber distribution boxes – mobile Series RIED

Series RIED

- **Socket outlet combination acc. EN 61439**
- Portable solid rubber distribution box
- **Dimensions: HxWxD = 280x235x285 mm**
- Lifting hinged top cover with 2 quick acting closures
- Fuses, control devices e.g. MCB, RCD, current indicator, ... under top cover
- Maximum safety- closed casing bottom with high ground clearance, prevention of water intake from bottom
- Sockets protected by overhanging box cover
- Space-saving storage- distributors are stackable

Standard version:

- Enclosure with solid rubber carrying handle
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable
- All outer metal parts made out of stainless steel
- Entry connection made out of flexible rubber cable with plug or flanged plug
- Housing protection **IP54**

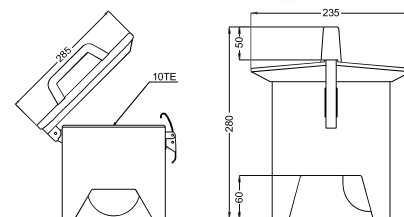

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
		1	2	3	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	1xCEE-wall mounted plug 32A 5p 400V	InA 32A RDF 0,8	9473377
		1	2	3	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,8	9473080
			2	4	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,8	9473012
			2	4	1 x RCD 40A/4/0.03A (TYPE A 25AT)	2 x MCB 16A 1p-C	2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V	InA 16A RDF 0,8	9473070
			2	4	1 x RCD 40A/4/0.03A (TYPE A 25AT)	2 x MCB 16A 1p-C	1xCEE-wall mounted plug 16A 5p 400V	InA 16A RDF 0,8	9473071
			2	4	1 x RCD 63A/4/0.03A (TYPE A 40AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-C	1xCEE-wall mounted plug 32A 5p 400V	InA 32A RDF 0,9	9473435
				6		6 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,7	9473487
				8	1 x RCD 40A/4/0.03A (TYPE A 25AT)		1xCEE-wall mounted plug 16A 5p 400V	InA 16A RDF 0,7	9473274

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor; VS = backup fuse