


# Solid-rubber distribution boxes – wall mounting

## Series SALZBURG

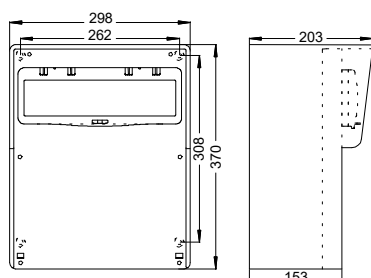

### Series SALZBURG

- **Socket outlet combination acc. EN 61439**
- Solid rubber enclosure with protective roof (optional without roof)
- **Dimensions HxWxD = 370x298x203**
- Front cover hinged to housing
- Window for up to max. 14 modules
- Ready wired for connection
- **IP54** (IP67 on request)

#### Standard version:

- **TOP-mounting** up to 13 modules- all switchgear and sockets mounted on front cover for easy fixation of the housing to the wall.
- **BOTTOM-mounting** up to 14 modules- all switchgear mounted on the housing.
- Protective insulation via 4-way wall fastening outside of wiring space
- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Window opening angle >180° (Optional: locking device)
- Ready wired on main connecting terminal for wiring through (max. 5x25mm<sup>2</sup> / 5x16mm<sup>2</sup> YF)
- Cable gland IP68 selective on top or bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

Layout examples: (other combinations on request!)

| Layout | CEE 400V 5p |     |     | SS 250V | Protection                      |                                                    | Connection                                                               | InA RDF            | Cat.No.             |
|--------|-------------|-----|-----|---------|---------------------------------|----------------------------------------------------|--------------------------------------------------------------------------|--------------------|---------------------|
|        | 63A         | 32A | 16A |         | RCD                             | MCB                                                |                                                                          |                    |                     |
|        |             |     | 2   | 3       | 1xRCD 63A/4/0.03A (TYPE A 40AT) | 2xMCB 16A 3p-C<br>3xMCB 16A 1p-B                   | 1xM32 (ø18-25mm) top<br>1xM32 (blind cap) bottom                         | InA 40A<br>RDF 0,7 | <b>9227142</b>      |
|        |             | 1   | 1   | 4       | 1xRCD 63A/4/0.03A (TYPE A 40AT) | 1xMCB 32A 3p-C<br>1xMCB 16A 3p-C<br>4xMCB 16A 1p-C | 1xM32 (ø18-25mm) top<br>1xM32 (blind cap) bottom                         | InA 40A<br>RDF 0,5 | <b>92272488</b>     |
|        |             | 1   | 1   | 3       | 1xRCD 63A/4/0.03A (TYPE A 40AT) | 1xMCB 32A 3p-C<br>1xMCB 16A 3p-C<br>3xMCB 16A 1p-B | 1xM32 (ø18-25mm) top<br>1xM32 (blind cap) bottom                         | InA 40A<br>RDF 0,6 | <b>92272001</b><br> |
|        |             |     |     |         | 1xRCD 40A/4/0.03A (TYPE B 40AT) |                                                    |                                                                          | InA 40A<br>RDF 0,6 | <b>92272001</b>     |
|        |             |     |     |         | 1xRCD 63A/4/0.03A (TYPE A 63AT) | 1xMCB 32A 3p-C<br>1xMCB 16A 3p-C<br>3xMCB 16A 1p-B | 1xM32 (ø18-25mm) top<br>2xM16 (ø5-10mm) top<br>1xCAT6-socket RJ45 double | InA 50A<br>RDF 0,7 | <b>92272523</b>     |
|        |             | 2   |     | 3       | 1xRCD 63A/4/0.03A (TYPE A 40AT) | 2xMCB 32A 3p-C<br>3xMCB 16A 1p-B                   | 1xM32 (ø18-25mm) top<br>1xM32 (blind cap) bottom                         | InA 40A<br>RDF 0,5 | <b>9227354</b>      |
|        | 1           | 1   | 1   | 2       | 1xRCD 63A/4/0.03A (TYPE A 63AT) | 1xMCB 32A 3p-C<br>1xMCB 16A 3p-C<br>2xMCB 16A 1p-B | 1xM40 (ø22-32mm) top<br>1xM40 (blind cap) bottom                         | InA 63A<br>RDF 0,4 | <b>9227746</b>      |

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor

...available on stock!