


Solid-rubber distribution boxes – mobile

Series SPITZ

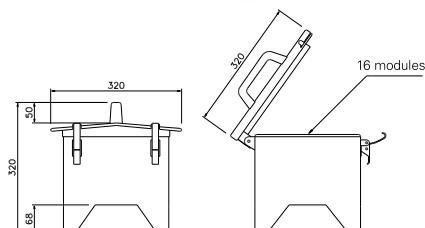

Series SPITZ

- **Socket outlet combination acc. EN 61439**
- Portable solid rubber distribution box
- **Dimensions: HxWxD = 320x320x320 mm**
- Lifting hinged top cover with 2 quick acting closures
- Fuses, control devices e.g. MCB, RCD, current indicator, ... under top cover
- Maximum safety- closed casing bottom with high ground clearance, prevention of water intake from bottom
- Sockets protected by overhanging box cover
- Space-saving storage- distributors are stackable

Standard version:

- Enclosure with solid rubber carrying handle
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable
- All outer metal parts made out of stainless steel
- Entry connection made out of flexible rubber cable with plug or flanged plug
- Housing protection **IP54** (IP67 on request)

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A		RCD	MCB			
		1	2	3	1 x RCD 63A/4/0,03A (TYPE A 63AT)	1 x MCB 32A 3p-C 2 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G16 with CEE-plug 63A 5p 400V	InA 63A RDF 0,6	94741511
					1 x RCD 40A/4/0,03A (TYPE B 40AT)	2 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,4	94742047
		1	2	4	1 x RCD 63A/4/0,03A (TYPE A 40AT)	2 x MCB 16A 3p-C 4 x MCB 16A 1p-B	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,6	9474584
		2	2	4	1 x RCD 63A/4/0,03A (TYPE A 40AT)	2 x MCB 16A 3p-C 4 x MCB 16A 1p-B	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,4	9474590
					1 x RCD 63A/4/0,03A (TYPE A 40AT)	1 x MCB 16A 3p-C 4 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,4	94741386
					1 x RCD 63A/4/0,03A (TYPE B 63AT)	2 x MCB 32A 3p-C 2 x MCB 16A 3p-C 2 x MCB 16A 1p-C	2m cable H07RN-F 5G16 with CEE-plug 63A 5p 400V	InA 63A RDF 0,4	94742063
		3		4	1 x RCD 63A/4/0,03A (TYPE A 63AT)	3 x MCB 32A 3p-C 2 x MCB 16A 1p-B	2m cable H07RN-F 5G10 with CEE-plug 63A 5p 400V	InA 63A RDF 0,4	9474320
			2	6	1 x RCD 63A/4/0,03A (TYPE A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-B	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,8	9474154
				10	1 x RCD 63A/4/0,03A (TYPE A 40AT)	10 x MCB 16A 1p-B	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,6	9474144

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor; VS = backup fuse

...available on stock!