


CEE Flanged sockets sloping

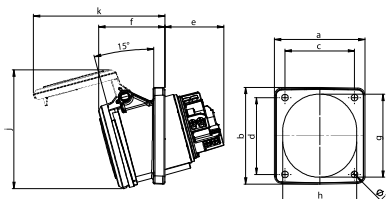


Flanged socket sloping IP44 POWER TWIST

Poles	63 Amp			63 Amp			63 Amp		
	3	4	5	3	4	5	3	4	5
Flange a [mm]	100	100	100	100	100	100	106	106	106
Flange b [mm]	112	112	112	107	107	107	110	110	110
Fixing center c [mm]	80	80	80	77	77	77	90	90	90
Fixing center d [mm]	88	88	88	85	85	85	90	90	90
e [mm]	64	64	64	64	64	64	64	64	64
f [mm]	74	74	74	74	74	74	74	74	74
g [mm]	92	92	92	92	92	92	92	92	92
h [mm]	82	82	82	82	82	82	82	82	82
i [mm]	7	7	7	7	7	7	7	7	7
j [mm]	132	132	132	132	132	132	132	132	132
k [mm]	146	146	146	146	146	146	146	146	146
Wire flexible [mm²]	6-16								
Wire solid [mm²]	6-25								
Contact screws [Ncm]	200								
Weight [g]	447	492	547	443	488	543	450	395	550

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
 - to order with pilot contact please add a „5“ e.g. 43351-6 (see page 8)
 - to order with pilot contact system (PCS) please add a „6“ e.g. 43361-6 (see page 8)

IP44 splashproof

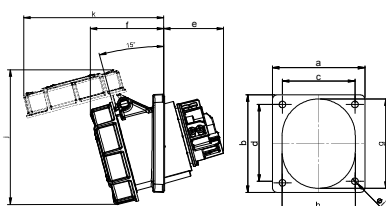


Flanged socket sloping IP67 POWER TWIST

Poles	63 Amp			63 Amp			63 Amp		
	3	4	5	3	4	5	3	4	5
Flange a [mm]	100	100	100	100	100	100	106	106	106
Flange b [mm]	112	112	112	107	107	107	110	110	110
Fixing center c [mm]	80	80	80	77	77	77	90	90	90
Fixing center d [mm]	88	88	88	85	85	85	90	90	90
e [mm]	64	64	64	64	64	64	64	64	64
f [mm]	80	80	80	80	80	80	80	80	80
g [mm]	92	92	92	92	92	92	92	92	92
h [mm]	82	82	82	82	82	82	82	82	82
i [mm]	7	7	7	7	7	7	7	7	7
j [mm]	148	148	148	148	148	148	148	148	148
k [mm]	154	154	154	154	154	154	154	154	154
Wire flexible [mm²]	6-16								
Wire solid [mm²]	6-25								
Contact screws [Ncm]	200								
Weight [g]	495	540	595	491	536	591	498	443	598

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
 - to order with pilot contact please add a „5“ e.g. 4355-6 (see page 8)
 - to order with pilot contact system (PCS) please add a „6“ e.g. 4356-6 (see page 8)

IP66/67 watertight

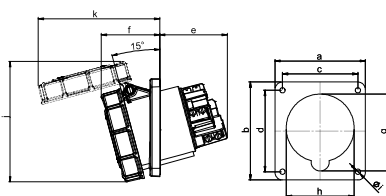

Flanged socket sloping IP67 POWER TWIST

Poles	125 Amp			125 Amp		
	3	4	5	3	4	5
Flange a [mm]	120	120	120	114	114	114
Flange b [mm]	130	130	130	114	114	114
Fixing center c [mm]	100	100	100	90	90	90
Fixing center d [mm]	108	108	108	90	90	90
e [mm]	92	92	92	92	92	92
f [mm]	77	77	77	77	77	77
g [mm]	102	102	102	102	102	102
h [mm]	90	90	90	90	90	90
i [mm]	7	7	7	7	7	7
j [mm]	160	160	160	160	160	160
k [mm]	162	162	162	162	162	162
Wire flexible [mm²]	16-50					
Wire solid [mm²]	16-70					
Contact screws [Ncm]	450					
Weight [g]	804	896	995	792	880	987

- contact frame with hexagon socket screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
 - to order with pilot contact please add a „5“ e.g. 4455-6 (see page 8)
 - to order with pilot contact system (PCS) please add a „6“ e.g. 4456-6 (see page 8)

IP66/67 watertight

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50– 500V~	>50– 500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
flange 100 x 112 - fixing center 80 x 88								
63	3	2	4331-4	4331-6	4331-9	4331-7	4331-10	4331-2
63	4	2	4341-4	4341-9	4341-6	4341-7	4341-10	4341-2
63	5	2	4351-4	4351-9	4351-6	4351-7	4351-10	4351-2
flange 100 x 107 - fixing center 77 x 85								
63	3	2	4331-4fc	4331-6fc	4331-9fc	4331-7fc	4331-10fc	4331-2fc
63	4	2	4341-4fc	4341-9fc	4341-6fc	4341-7fc	4341-10fc	4341-2fc
63	5	2	4351-4fc	4351-9fc	4351-6fc	4351-7fc	4351-10fc	4351-2fc
flange 106 x 110 - fixing center 90 x 90								
63	3	2	4331-4fd	4331-6fd	4331-9fd	4331-7fd	4331-10fd	4331-2fd
63	4	2	4341-4fd	4341-9fd	4341-6fd	4341-7fd	4341-10fd	4341-2fd
63	5	2	4351-4fd	4351-9fd	4351-6fd	4351-7fd	4351-10fd	4351-2fd



4351-6

flange 100 x 112 - fixing center 80 x 88								
63	3	2	433-4	433-6	433-9	433-7	433-10	433-2
63	4	2	434-4	434-9	434-6	434-7	434-10	434-2
63	5	2	435-4	435-9	435-6	435-7	435-10	435-2
flange 100 x 107 - fixing center 77 x 85								
63	3	2	433-4fc	433-6fc	433-9fc	433-7fc	433-10fc	433-2fc
63	4	2	434-4fc	434-9fc	434-6fc	434-7fc	434-10fc	434-2fc
63	5	2	435-4fc	435-9fc	435-6fc	435-7fc	435-10fc	435-2fc
flange 106 x 110 - fixing center 90 x 90								
63	3	2	433-4fd	433-6fd	433-9fd	433-7fd	433-10fd	433-2fd
63	4	2	434-4fd	434-9fd	434-6fd	434-7fd	434-10fd	434-2fd
63	5	2	435-4fd	435-9fd	435-6fd	435-7fd	435-10fd	435-2fd



435-6

flange 120 x 130 - fixing center 100 x 108								
125	3	2	443-4	443-6	443-9	443-7	443-10	443-2
125	4	2	444-4	444-9	444-6	444-7	444-10	444-2
125	5	2	445-4	445-9	445-6	445-7	445-10	445-2
flange 114 x 114 - fixing center 90 x 90								
125	3	2	443-4fe	443-6fe	443-9fe	443-7fe	443-10fe	443-2fe
125	4	2	444-4fe	444-9fe	444-6fe	444-7fe	444-10fe	444-2fe
125	5	2	445-4fe	445-9fe	445-6fe	445-7fe	445-10fe	445-2fe



445-6

