


CEE Flanged plugs




Flanged plug straight IP44

POWER TWIST

	63 Amp		
Poles	3	4	5
Flange a x b [mm]	100	100	100
Fixing center c x d [mm]	80	80	80
e [mm]	39	39	39
f [mm]	73	73	73
g [mm]	7	7	7
h [mm]	77	77	77
Wire flexible [mm ²]	6-16		
Wire solid [mm ²]	6-25		
Contact screws [Ncm]	200		
Weight [g]	328	378	427

- contact frame with screws
- housing material: PA6
- contacts: nickel-plated contacts, with pilot contact (see page 8)
- for dust cover see accessories on page 50

IP44 splashproof

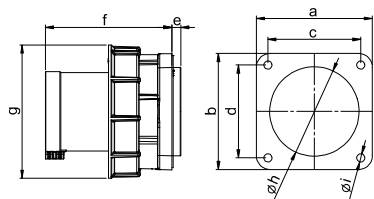


Flanged plug straight IP66/67

POWER TWIST

	63 Amp		
Poles	3	4	5
Flange a x b [mm]	100	100	100
Fixing center c x d [mm]	80	80	80
e [mm]	8	8	8
f [mm]	109	109	109
g [mm]	115	115	115
h [mm]	77	77	77
i [mm]	7	7	7
Wire flexible [mm ²]	6-16		
Wire solid [mm ²]	6-25		
Contact screws [Ncm]	200		
Weight [g]	479	531	570

- contact frame with screws
- housing material: PA6
- contacts: nickel-plated contacts, with pilot contact (see page 8)
- for waterproof cover see accessories on page 50

IP66/67 watertight

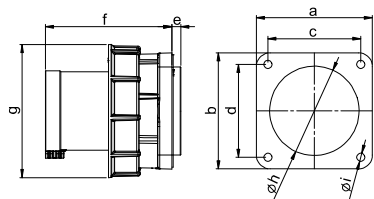

Flanged plug straight IP66/67

POWER TWIST

	125 Amp		
Poles	3	4	5
Flange a x b [mm]	120	120	120
Fixing center c x d [mm]	100	100	100
e [mm]	13	13	13
f [mm]	118	118	118
g [mm]	131	131	131
h [mm]	95	95	95
i [mm]	7	7	7
Wire flexible [mm ²]	16-50		
Wire solid [mm ²]	16-70		
Contact screws [Ncm]	450		
Weight [g]	786	891	998

- contact frame with hexagon socket screws
- housing material: PA6
- contacts: nickel-plated contacts, with pilot contact (see page 8)
- for waterproof cover see accessories on page 50

IP66/67 watertight

			110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
Amp.	Poles	pack. unit	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

flange 100 x 100 - fixing center 80 x 80								
63	3	2	6331-4k	6331-6k	6331-9k	6331-7k	6331-10k	6331-2k
63	4	2	6341-4k	6341-9k	6341-6k	6341-7k	6341-10k	6341-2k
63	5	2	6351-4k	6351-9k	6351-6k	6351-7k	6351-10k	6351-2k



6351-6k

flange 100 x 100 - fixing center 80 x 80								
63	3	2	633-4	633-6	633-9	633-7	633-10	633-2
63	4	2	634-4	634-9	634-6	634-7	634-10	634-2
63	5	2	635-4	635-9	635-6	635-7	635-10	635-2



635-6

flange 120 x 120 - fixing center 100 x 100								
125	3	2	643-4	643-6	643-9	643-7	643-10	643-2
125	4	2	644-4	644-9	644-6	644-7	644-10	644-2
125	5	2	645-4	645-9	645-6	645-7	645-10	645-2



645-6

