

## DESCRIPTION

These models have all the functionality of the smaller units, but with added flexibility on the supply voltage and input port.




As well as standard voltages up to 500V AC, they have the option of being supplied as MV units that are able to accept voltages of up to 600 volts and HV units that are able to

accept voltages up to 690 volts for motors with armatures of up to 750 volts DC.

All models are also available with the high current 3 phase supply terminals in standard top entry, or bottom entry as an option.

## PRODUCT NAME

# PL/X275-440

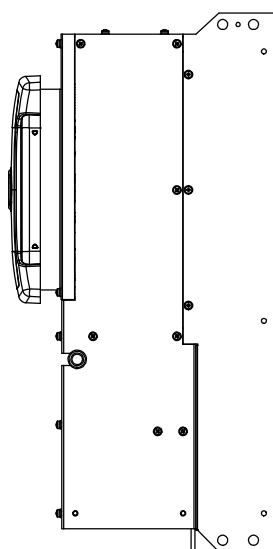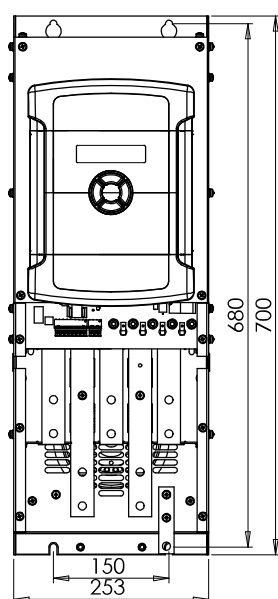

## RATINGS & DIMENSIONS

PL 2 QUADRANT PLX 4 QUADRANT	KW @ 460v	HP @ 460v	ARMATURE CURRENT DC AMPS	FIELD AMPS
PL and PLX 275	275	370	650	32
PL and PLX 315	315	425	750	32
PL and PLX 360	360	485	850	32
PL and PLX 400	400	540	950	32
PL and PLX 440*	440	590	1050	32

\* PLX 440 no overload  
50 Amp field option

## FRAME SIZE

H	700 mm
W	253 mm
D	350 mm

## SHIPPING WEIGHT

45kg

## Venting kit for units PL/X275-440

The venting kit comprises two steel ducts which are designed to telescope together. There is also a protective cowl for mounting on the enclosure roof. The duct length from the top of the drive is adjustable between 270mm to 538mm.