






file n° 302208




RPU 80-6 S



RPU 125-8 S
RPU 160-8 S



RPU 250-11 S
RPU 400-11 S

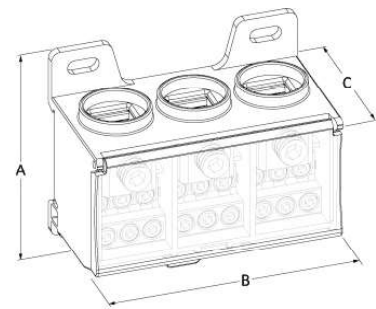

RPT 125-6 S
RPT 160-6 S

1 POLE

Code	Reference		In (A)		Weight (Kg)	A (mm)	B (mm)	C (mm)
			IEC/EN	UL				
RPU2995	RPU 80-6 S	1	80	85	0,071	66	30	46
RPU3000	RPU 125-8 S	1	125	130	0,162	75	40	48
RPU3005	RPU 160-8 S	1	160	175	0,166	75	40	48
RPU3010	RPU 250-11 S	1	250	230	0,331	96	47	50
RPU3015	RPU 400-11 S	1	400	310	0,358	96	47	50

3 POLE

Code	Reference		In (A)		Weight (Kg)	A (mm)	B (mm)	C (mm)
			IEC/EN	UL				
RPT3000	RPT 125-6 S	1	125	130	0,331	75	85	48
RPT3005	RPT 160-6 S	1	160	175	0,354	75	85	48

TECHNICAL DATA

Code	Type	IN/OUT	COFLEX* L (mm)	Stripped wire (mm ²)	Wire with ferrule (mm ²)	No.	Dim. (mm)	(Nm)	Icw (kA)	Ipk (kA)	Ui (V)	
											IEC/EN	UL
RPU2995	1 Pole 6 outputs 80 A	IN	-	6 ÷ 16	6 ÷ 16	1	ø 6,8	2	4,2	25	690	600
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	2	ø 6,8	2				
		OUT	-	2,5 ÷ 6	2,5 ÷ 6	4	ø 4,5	1				
RPU3000	1 Pole 8 outputs 125 A	IN	9	10 ÷ 35	10 ÷ 35	1	11x9	6	4,5	25	690	600
		IN/OUT	-	6 ÷ 16	6 ÷ 16	1	8,7x6	3				
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	8	ø 6,8	3				
RPU3005	1 Pole 8 outputs 160 A	IN	9-13	10 ÷ 70	10 ÷ 50	1	13,5x11,5	10	4,5	25	690	600
		IN/OUT	-	6 ÷ 16	6 ÷ 16	1	8,7x6	3				
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	8	ø 6,8	3				
RPU3010	1 Pole 11 outputs 250 A	IN	13-15,5	35 ÷ 120	35 ÷ 95	1	16x14	14	6	25	1000	600
		OUT	-	6 ÷ 35	6 ÷ 25	2	ø 9	10				
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	5	ø 6,8	6				
		OUT	-	2,5 ÷ 10	2,5 ÷ 10	4	ø 6,1	3				
RPU3015	1 Pole 11 outputs 400 A	IN	15,5-20	95 ÷ 185	95 ÷ 120	1	20,5x16	25	6	25	690	600
		OUT	-	6 ÷ 35	6 ÷ 25	2	ø 9	10				
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	5	ø 6,8	6				
		OUT	-	2,5 ÷ 10	2,5 ÷ 10	4	ø 6,1	3				
RPT3000	3 Pole 6 outputs 125 A	IN	9	10 ÷ 35	10 ÷ 35	1	11x9	6	4,5	25	690	600
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	6	ø 6,8	3				
RPT3005	3 Pole 6 outputs 160 A	IN	9-13	10 ÷ 70	10 ÷ 50	1	13,5x11,5	10	4,5	25	690	600
		OUT	-	2,5 ÷ 16	2,5 ÷ 16	6	ø 6,8	3				

Icc pk = Short-circuit current peak value expressed in kA

Icw = Effective value of short-circuit current, duration equal to 1 second, expressed in kA as per standard IEC 947-7-1

Ui = Nominal insulation voltage

* See COFLEX technical features