
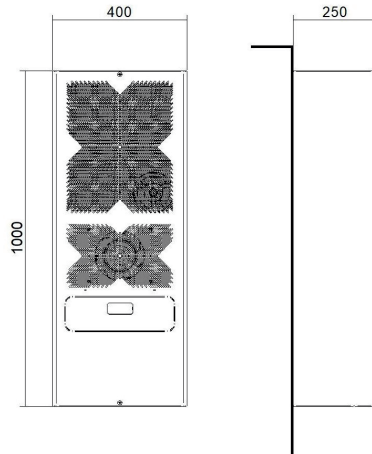


NXT20


Door- or wall-mount air conditioners

COOLING CAPACITY 2000 W

DIMENSIONS

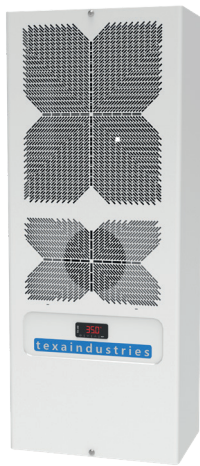

PERFORMANCE

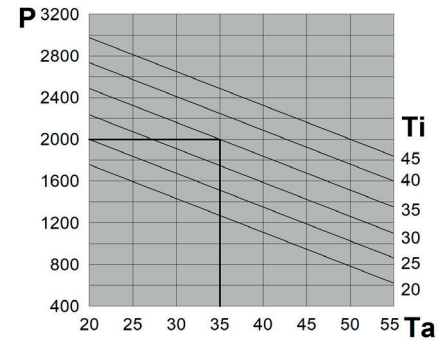

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Features	UoM	NXT20B0E1C0000	NXT20H0E1C0000	NXT20B0E1U0000	NXT20C0E1U0000	NXT20H0E1U0000	NXT20V0E1C0000
Cooling capacity EN14511 - A35A35	W	2000	2000	2000	2000	2000	2000
Cooling capacity EN14511 - A35A50	W	1500	1500	1500	1500	1500	1500
Power supply	V ~ Hz	230 - 1 - 50/60	400/3/50 460/3/60	230 - 1 - 50/60	115 - 1 - 50/60	400/3/50 460/3/60	48VDC
Width - Height - Depth	mm	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250	400 - 1000 - 250
Max current	A	4.8	1.6	4.8	9.6	1.6	21
Inrush current	A	21.8	12	21.8	56.8	12	-
T Fuse	A	10	4	10	16	4	26
Power draw EN14511 - A35A35	W	990	870	990	990	870	890
Power draw EN14511 -A35A50	W	1130	1050	1130	1130	1050	1030
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m ³ /h	885	885	885	885	885	885
Internal temperature range	°C	20-45	20-45	20-45	20-45	20-45	20-45
Temperature regulation	-	TX-i40 electronic thermostat factory set to 35°C					
External temperature range	°C	20-55	20-55	20-55	20-55	20-55	20-55
Ingress protection cabinet side	-	IP55	IP55	NEMA TYPE 12	NEMA TYPE 12	NEMA TYPE 12	IP55
Noise level	d B (A)	65	65	65	65	65	65
Weight	kg	42	44	42	42	44	42
Conformity	-	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC	CE UK EAC