


NXT40


Door- or wall-mount air conditioners

COOLING CAPACITY **3850 W**

DIMENSIONS

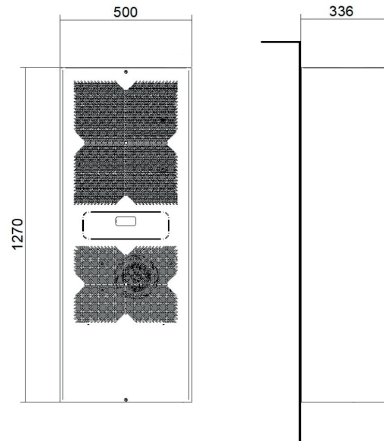

PERFORMANCE

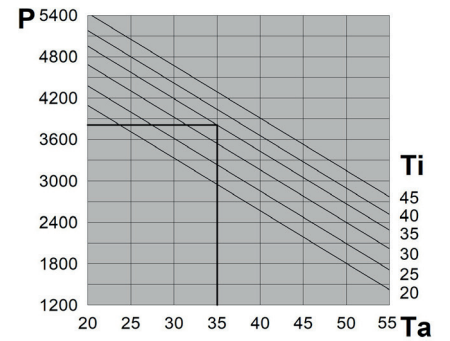

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Features	UoM	NXT40B0E1C0000	NXT40H0E1C0000	NXT40B0E1U0000	NXT40H0E1U0000
Cooling capacity EN14511 - A35A35	W	3850	3850	3850	3850
Cooling capacity EN14511 - A35A50	W	2650	2650	2650	2650
Power supply	V ~ Hz	230 - 1 - 50/60	400/3/50 - 460/3/60	230 - 1 - 50/60	400/3/50 - 460/3/60
Width - Height - Depth	mm	500 - 1270 - 336	500 - 1270 - 336	500 - 1270 - 336	500 - 1270 - 336
Max current	A	7.8	3.1	7.8	3.1
Inrush current	A	37	16	37	16
T Fuse	A	16	6	16	6
Power draw EN14511 - A35A35	W	1670	1580	1670	1580
Power draw EN14511 -A35A50	W	1980	1920	1980	1920
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
Cabinet air fan capacity	m ³ /h	1500	1500	1500	1500
Internal temperature range	°C	20-45	20-45	20-45	20-45
Temperature regulation	-	TX-i40 electronic thermostat factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
Ingress protection cabinet side	-	IP55	IP55	NEMA TYPE 12	NEMA TYPE 12
Noise level	dB (A)	70	70	70	70
Weight	kg	88	89	88	89
Conformity	-	CE UK EAC	CE UK EAC	UL CE UK EAC	UL CE UK EAC